



Features

- Replacing traditional 6" CFL, HID or Incandescent commercial down lights
- Ideal design of thermal solution, with long lifespan 35,000hrs
- 0-10V dimming solution, stable and without flickering
- Optional for various CCT
- UL and Energy Star pending



5 YEAR
WARRANTY

Recommended Applications

- Ideal for retrofit applications like hotel lobby, shopping center, supermarket, recreations center, public area, corridors, offices, reception areas, schools, hospitality, retail environments etc.




Ordering Information

Ordering Code	Input Voltage(VAC)	Lamp Shape	Wattage (W)	CCT	Beam Angle	Initial Lumens(lm)	lamp Efficacy(lpw)	Rated life(hrs)	CRI	Power Factor	Dimmable	Certificate
CDW35DR627KAH	100~277	6"Downlight	35	2700	90°	2400	75	35000	82	0.9	0-10V	UL
CDW35DR630KAH	100~277	6"Downlight	35	3000	90°	2400	75	35000	82	0.9	0-10V	UL
CDW35DR635KAH	100~277	6"Downlight	35	3500	90°	2400	75	35000	82	0.9	0-10V	UL
CDW35DR640KAH	100~277	6"Downlight	35	4000	90°	2400	75	35000	82	0.9	0-10V	UL
CDW35DR650KAH	100~277	6"Downlight	35	5000	90°	2400	75	35000	82	0.9	0-10V	UL

1. CCT range complies to ANSI C78.377-2011
2. Rated average life based on engineering testing and probability analysis
3. Lifetime test consistent with IESNA LM80 lumen maintenance procedure

Product Dimension(inches)

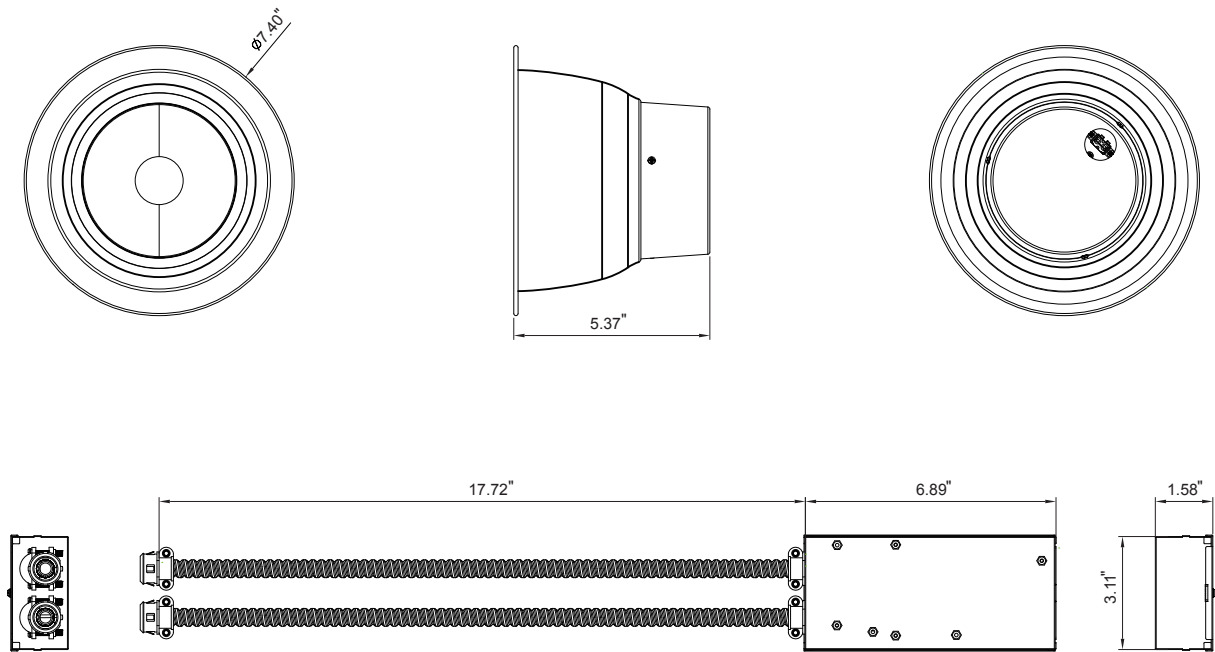

Specifications are subject to change without notice.
 Updated Date: February 12th, 2015