


# LED SHOPLIGHT INSTALLATION INSTRUCTIONS



## IMPORTANT - READ ALL INSTRUCTIONS BEFORE INSTALLATION

- Installation and maintenance must be performed by licensed electricians only.
- To avoid risk of electric shock, make sure to turn off main power switch prior to installation or maintenance.
- Must be installed in compliance with National Electrical Code (NEC) in the US or Canadian Electrical Code in Canada.
- Ensure input voltage and frequency are compatible with the fixture. Check product manual for power requirements prior to installation.

**A**

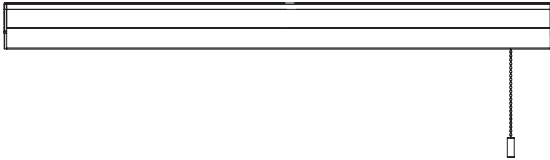

Luminaire Dimensions:  
Length: 47.28", 120.0 cm  
Width: 5.12", 13 cm  
Depth: 2.75", 7 cm  
Aircraft cables : 11.81", 30 cm

**B**




Volts (V): 120  
Frequency (Hz): 60  
Watts (W): 40  
Input current (mA): 450  
Weight: 1.36 kg / 3.55lbs  
Mounting options: Surface or suspended with aircraft cables (included)

## CAUTION

- Before installation inspect luminaire for any exterior damages or other defects.
- Before installation confirm luminaire is the correct rated voltage for application.
- During installation do not damage luminaire with drill or external impact.
- Do not expose or operate this luminaire directly to high heat and/or combustibles and/or flammable materials.
- Beware of shock when installing luminaire.
- Do not install in areas where flooding may occur. For indoor use dry and damp location only. Do not expose or operate the product in areas with heavy humidity or chance of water exposure.
- Do not clean or expose the luminaire to detergent, chemical cleaners or pesticides.
- Upon completion of installation, ensure the luminaire is tight and secure.
- Turn power off when disassembling.
- Do not look directly into LED luminaire when lit.
- Do not exchange components in luminaire.
- Do not operate the fixture where ambient temperature is over 40°C or in confined spaces. This is a fire hazard.
- Do not install luminaire in applications where high vibrations or external shock are present.
- Do not install/operate luminaire in areas where salt content in the air and soil could cause the luminaire to corrode.
- Do not install luminaire in areas where corrosive substances are present.
- Do not install luminaire in areas where organic debris can accumulate on luminaire (example: fallen leaves, insects).
- This luminaire is designed to operate horizontally mounted with the LEDs facing down.
- In the event of product failure resulting from negligence of above mentioned instructions, limited warranty will not be applicable.

## SUSPENDED INSTALLATION

1. Turn off the power.
2. Mark two spot on the ceiling 45 7/8" / 114.3 cm distance for the mounting hardware
3. Drill two holes on the marks using the appropriately sized drill bit. Insert the provided anchors into the holes.
4. Insert a hook in the locking cover and screw in the ceiling.
5. Slide the base of the cable into one of the keyholes in effect at the rear of the light.
6. Secure the head of the suspension cable with locking lid and tighten.
7. Hang the fixture by installing the hanging chains onto the hook that has been previously installed in the ceiling. The fixture must hang at least 3 in. from the ceiling.
8. Plug the power cord into the power supply and turn back on the power. Then pull down the chain to turn on.

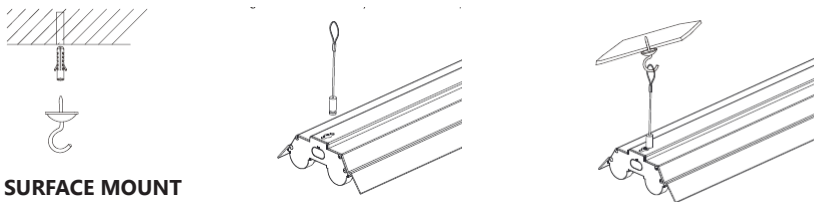

## SURFACE MOUNT

1. Turn off power
2. Indicate the ceiling 2 marks at a distance of 45 7/8" / 114.3 cm to each other for mounting hardware.
3. Drill two holes using the appropriate drill and insert the plastic anchors into the holes.
4. Screw the mounting screws in the plastic anchors making sure to leave 2-3 mm between the screw head and the mounting surface.
5. Align the keyholes of the shop light to the screw heads. Slide the light from one side to secure it safely. The light should be firmly attached to the screw.
6. Plug the power cord into the power supply and turn back on the power. Then pull down the chain to turn on.

