



## SPECIFICATION

Efficacy	120lm/w
CRI	>85
CCT	3000K,4000K,5000K
Power Factor	>0.95
Rated Input	AC100-277V/AC347V
Ambient Temperature	- 30°C~ + 40°C

## ELECTRICAL(OPTION)

Emergency Back Up

Dimmable(DC 1-10V or DC 0-10V)

Microwave sensor

**Note:Specification subject to change without notice.**

## FEATURE

- Lightweight,flexible and durable polycarbonate construction makes the luminaire vandal resistant and highly impact resistant .
- The UV stabilized polycarbonate diffuser eliminates glare and is integrated with crystals that assist in the enhancement of even light distribution (clear lens optional).(10) closure clips that securely and evenly seal the luminaire
- Long life LEDs, coupled with high-efficiency driver, provide superior quantity and quality of illumination for extended service life .Brandon LED IP65 Vapor Tight Fixture is rated to deliver LM80 performance for 50,000 hours.
- Stainless steel mounting hardware for wall,ceiling or suspended mounting.

## 4ft LED vaportight fixture


### MX486-LD Series

The luminaire ideal for a variety of industrial, commercial,vandal resistant and residential applications.Installed either indoors or outside ,the MX486 provides superior light distribution, Intended for applications where moisture and dust may be present.

## DIMENSION

All dimensions are inches(millimeters) unless otherwise noted .

Length	Width	Depth
49 6/8 (1277)	6 6/8(172)	3 6/8 (95)

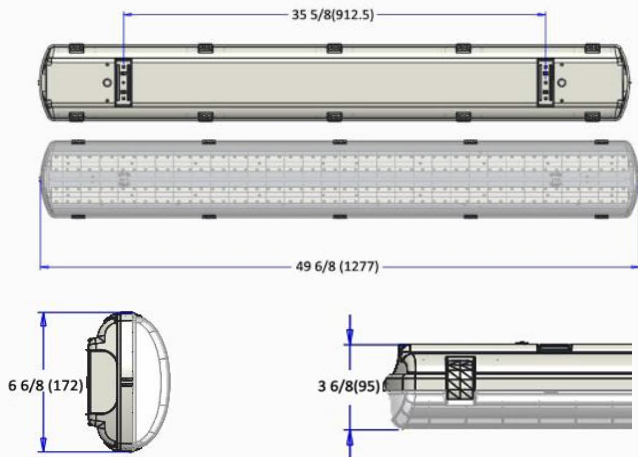

Model	MX486-LD40W	MX486-LD60W	MX486-LD75W
Lumens	4,800lm	7,200lm	9,000lm