



Recessed Gimbal Downlight | Uranus Series

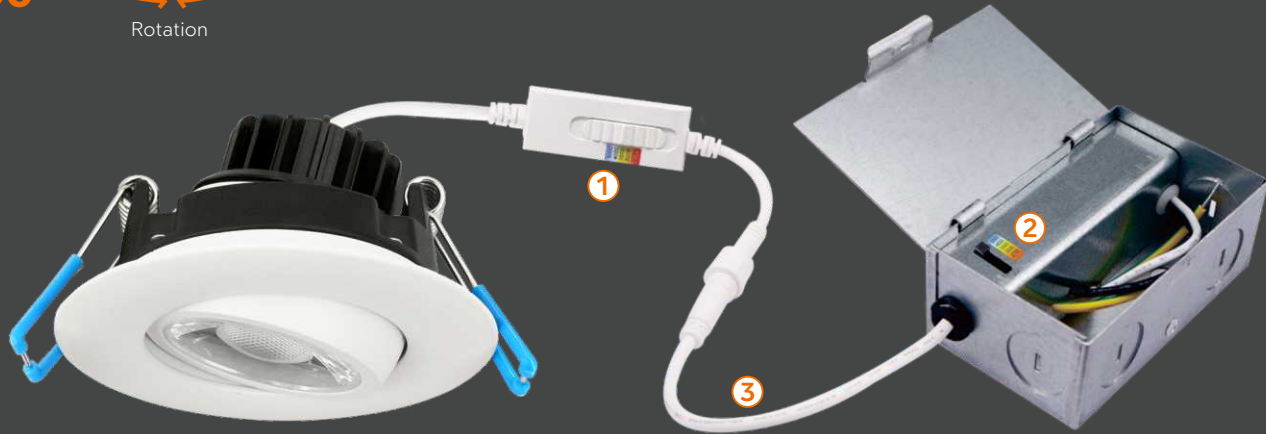


Get the right light in the right place with our Uranus 2", 3", 4" & 6" series gimbals, the gimbals come with a 38° beam acrylic optic, producing a consistent, precise beam of light. In addition, they rotate 360° and tilt up to 30° so you can mount them in any orientation in the ceiling and still aim the light to graze textured walls, highlight artwork, or emphasize architectural features. Perfect for residential, retail and hospitality applications.



① Selectable CCT switch on the wire (optional)

Slide switch on wire CCT can be set to 2700K, 3000K, 3500K, 4000K, 5000K



② Selectable CCT switch on the J-box (optional)

Slide switch on driver CCT can be set to 2700K, 3000K, 3500K, 4000K, 5000K

③ FT1, FT4 & FT6 cable are available

Various sizes from 2" to 6" round & square gimbals are available



Recessed Gimbal Downlight | Uranus Series




3" Round



Key Features

- 3" round LED recessed gimbal with integral driver in connection box
- Eyeball, round & square models
- Type IC rated-no housing needed
- Single CCT or multiple CCT are available
Flexibility to switch color temperature during installation to suit a specific application, just adjust the color temperature with the slide switch located on the wire or the junction box
- Superior LED performance and lifespan
- 30° tilting, 360° rotation
- Cut hole in ceiling and snap fixture in opening with attached spring clips
- Aluminum construction

Dimensions

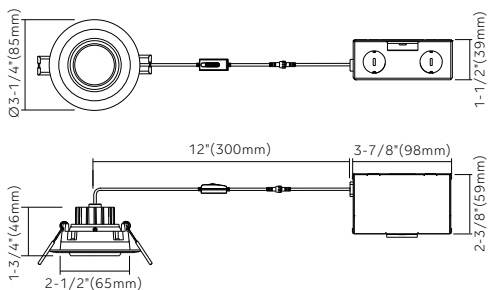

Ordering Guide

Series	Wattage	Color Temperature	Voltage	Finish
AD-LED3S Recessed Gimbal-3" Round	8W	30K (3000K-Single CCT) 40K (4000K-Single CCT) 50K (5000K-Single CCT) 3CCT (3000K/4000K/5000K) 5CCT (2700K/3000K/3500K/4000K/5000K)	(Blank) 120V only	- MW (Matte White) - MB (Matte Black) - BZ (Bronze) - BN (Brushed Nickel) *

*-Custom finishes are available

Specifications

Models	ADLED3S		
Applications	Sloped ceiling, highlighting artwork		
Wattage	8W		
Color Temperature(K)	Single CCT	3CCT	5CCT
	3000/4000/5000	3000/4000/5000	2700/3000/3500 /4000/5000
Lumen Output(lm)	600/620/640	540/560/580	480/490/510 /530/550
Halogen Equivalent	60W		
Beam Angle	38°		
CRI	80/90		
Driver Input	120V AC		
Power Factor	0.9		
Dimming	TRIAC dimmers 100%-10%		
Cut out	2-7/8" (72mm)		
Approved Location*	Insulated ceiling, Indoor & Damp/Wet location		
Ambient Temperature	-40°C to +40°C		
Air Tight	Yes		
Projected Life	70% light output at 50,000 hours		
Certification	ETL		
Warranty*	5-year I warranty		

Approved Location*-please contact our sales for outdoor application

Warranty*-refer to Lightopia warranty policy

120V Input Driver Included



Accessories

AC120V driver




Model: LR-D120-08A
(Aluminum version)



Model: LR-D120-08S
(Steel version)

Rough-in plate



Model: LR-RP-U

Extension cables (2pin)



For single CCT or multiple CCT fixtures with CCT switch on the wire
Model: LR-EXC6 6' 2pin cable
LR-EXC10 10' 2pin cable
LR-EXC20 20' 2pin cable

Extension cables (3pin)



For multiple CCT fixtures with CCT switch on the junction box
Model: LR-EXC6-S3 6' 3pin cable
LR-EXC10-S3 10' 3pin cable
LR-EXC20-S3 20' 3pin cable

Example: ADLED3S-8W-5CCT-MW