


4 Inch

Regress Open Plenum Rated


- 2" ceiling space required for installation
- Type IC, Air-Tight & Wet - No Housing Required
- Made of durable aluminum material
- I.C. rated for direct contact with insulation
- Suitable for DAMP LOCATION
- Open plenum rated-suitable for commercial installations

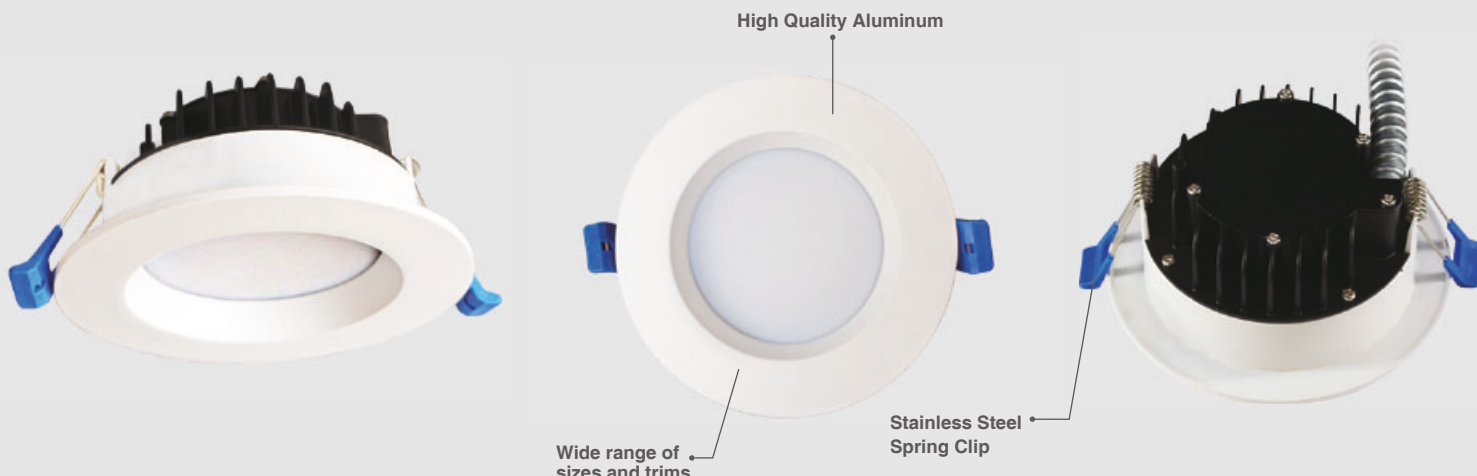


Trim Options



SPECIFICATIONS	
Application	Recessed Ceiling Mount
Watts	12W
CRI	90Ra+ (80Ra Optional)
Color Temperature(K)	2700K/3000K/3500K/4000K/5000K
Light Ouput(lm)	1020lm
Default Driver Input	AC120V, 60Hz
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	Damp Location
Air Tight	Yes
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	90°

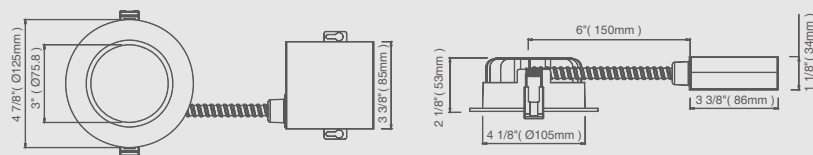

Cut Hole Size
04-1/4" (108mm)



Accessories

Mounting Plate



Model MP4-3



Model MP4-1



Model MP-UNV

See Page 80-81

Emergency Driver



Model AL-GM30-3000600

See Page 81

Ordering

MODELS	CCT	FINISH
LED-S12W-XXKYY-RE	XX=fixed CCT (27K=2700K, 3K=3000K, 35K=3500K, 4K=4000K, 5K=5000K)	YY=WH(White), BK(Black), BN(Brushed Nickel), BZ(Bronze)

Notes:

* XX represents different CCT, 27 for 2700K; 3 for 3000K; 35 for 3500K; 4 for 4000K; 5 for 5000K.
* YY represents different color finish, WH for white; BN for brushed nickel; BK for Black; BZ for Bronze.
Example: LED-S12W-27KWH-RE