

3.5" LED Regressed Gimbal

Recessed LED Gimbal Light



Dimmable



Die-cast
Aluminum



Optic Options



Lumen Output



Color Rendering
Index

TRIM OPTIONS




Features

- Durable aluminum body with adjustable gimbal or fixed aluminum body
- CRI: 80
- It is a high-performance, easy to install residential or commercial grade downlight solution
- Beam angle: 40°

Benefits

- 100%-10% dimming capability, this fixture is compatible with industry standard TRIAC/ELV dimmers
- Type IC Rated - No Housing Required
- Fast & Easy To Install - Save On Labour
- Driver Inside Connection Box - No Junction Box Needed
- Directional Beam - Great for Sloped Ceilings and Highlighting Artwork

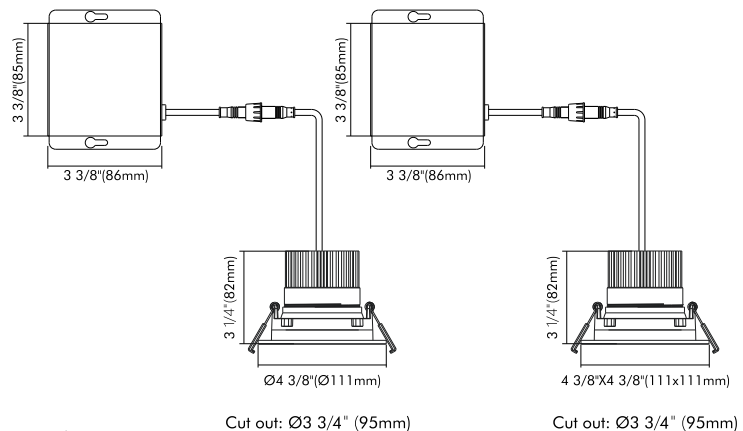

Cut out: Ø4 3/8" (95mm)

Cut out: Ø4 3/8" (95mm)

Warranty

- 5-year limited system warranty standard



Specification

Model	Series	Input Voltage	Wattage	Lumen Output	Luminous Efficacy	CRI	Beam Angle	Projected Life	CCT'S
AD-LED-35-S12W-*K**.-REY	Round	120V	12W	800 Lm	66.7Lm/w	80	40° Beam with 30° tilt and 360° rotation	50,000 hrs	3000K, 4000K, 5000K
AD-LED-35-S12W-*K**.-REY-SQ	Round	120V	12W	800 Lm	66.7Lm/w	80	40° Beam with 30° tilt and 360° rotation	50,000 hrs	3000K, 4000K, 5000K

ORDERING GUIDE Example: AD-LED-35-S12W-*K**.-REY

Color Temperature	Trim Finish
AD-LED-35-S12W- 3K : 3000K 4K : 4000K 5K : 5000K	-REY WH : White BK : Black BN : Brushed Nickel

3.5" LED Regressed Downlight

Recessed LED Gimbal Light



TRIM OPTIONS




Features

- Durable aluminum body with adjustable gimbal or fixed aluminum body
- CRI: 80
- It is a high-performance, easy to install residential or commercial grade downlight solution
- Beam angle: 40°


Benefits

- 100%-10% dimming capability, this fixture is compatible with industry standard TRIAC/ELV dimmers
- Type IC Rated - No Housing Required
- Fast & Easy To Install - Save On Labour
- Driver Inside Connection Box - No Junction Box Needed
- Directional Beam - Great for Sloped Ceilings and Highlighting Artwork

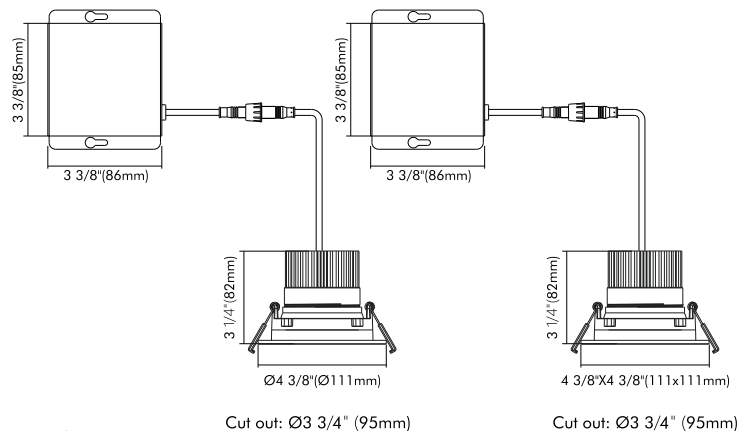

Warranty

- 5-year limited system warranty standard



Specification

Model	Series	Input Voltage	Wattage	Lumen Output	Luminous Efficacy	CRI	Beam Angle	Projected Life	CCT'S
AD-LED-35-S12W-*K**~R	Round	120V	12W	800 Lm	66.7Lm/w	80	40° Beam	50,000 hrs	3000K, 4000K, 5000K
AD-LED-35-S12W-*K**~SQ	Round	120V	12W	800 Lm	66.7Lm/w	80	40° Beam	50,000 hrs	3000K, 4000K, 5000K

ORDERING GUIDE Example: AD-LED-35-S12W-*K**~R

Color Temperature	Trim Finish
AD-LED-35-S12W- 3K : 3000K 4K : 4000K 5K : 5000K	WH : White BK : Black BN : Brushed Nickel -R