

Captarent LED

Wall Mounted • Damp Location Listed **PROGRESS LED**

Description:

Captarent Collection 30x36 in. Rectangular Illuminated Integrated LED White Modern Mirror


Specifications:

- Reflective Silver Glass Flat Square/Rectangular
- Diffused Glass Flat Square/Rectangular
- Dimmable to 10% brightness (See Dimming Notes)
- 59 in of wire supplied
- Americans With Disabilities Act (ADA) compliant

Performance:

Input Power	30 W
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Delivered)	2,687/90 (LM-79)CRI 90 CRI
Life (hours)	50000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15, Class B
Warranty	5-year Limited Warranty
Labels	cETLus Damp Location Listed
	Meets California Title 24 JA8-2016

P300455-030-30

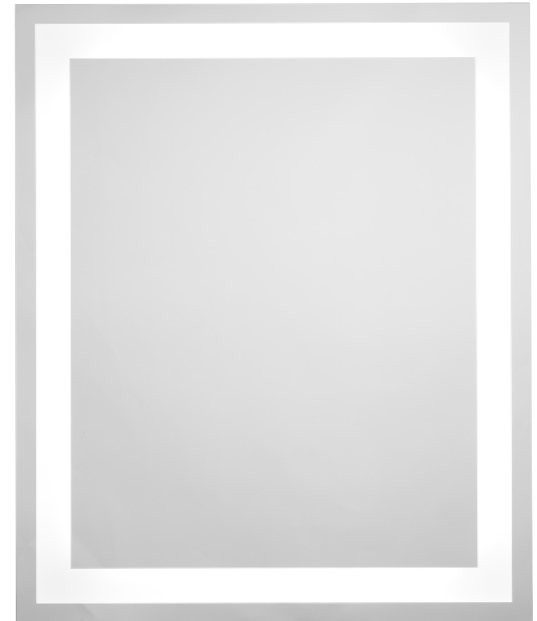

Dimensions:

Width: 30 in
Extends: 2 in
Height: 36 in

Reflective Silver Glass Flat Square/Rectangular
Width: 0-1/4 in
Height: 30 in

Photometrics:

P300455-030-30

ELECTRICAL DATA	P300455-030-30
Input Voltage	120 V
Input Frequency	60 Hz
THD	<20%
EMI/RFI	FCC Title 47, Part 15, Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*
Over-voltage, over-current, short-circuit protected	

*See Dimming Notes for more information

P300455-030-30

Dimming Notes:

P300455-030-30 is designed to be compatible with many ELV/Reverse Phase Triac/Forward Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls:

Eaton SAL06P

Leviton 6681

Leviton 6672

Leviton 6674

Lutron NTEVL-300

Lutron DVELV-300P

Lutron DVCL-253P

Lutron AYCL-153P

Lutron SCL-153P

Lutron TGCL-153-PH-WH

Lutron MACL-153M

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.