

One-Light LED Flush Mount

Ceiling mounted • Damp location listed



P350053-009-30

Description:

One-light 11" LED Flush Mount series featuring an etched glass shade in a Brushed Nickel finish. Fixtures are dimmable to 10 percent with Triac or ELV dimmers.

Specifications:

- Brushed Nickel (-009) (plated)
- Steel Construction
- Etched glass diffuser
- LED Module is replaceable (part # 93074038)
- 120V AC replaceable module.
- 3000k color temperature, 90+ CRI
- TM-21 60,000 hour life.
- 1452 lumens 83 lumens/watt (source).
- Dimmable to 10% brightness (See Dimming Notes)
- Unit covers a standard 4" octagonal recessed outlet box
- Mounting plate for outlet box included
- 6" of wire supplied
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

Performance:

| | |
|------------------------|---|
| Number of Modules | 1 |
| Input Power | 17w |
| Input Voltage | 120 V |
| Input Frequency | 60 Hz |
| Lumens/LPW (Source) | 1452/83 (LM-82) |
| Lumens/LPW (Delivered) | 1248/71.7 (LM-79) |
| CCT | 3000 K |
| CRI | 90+ |
| Life (hours) | 60,000 (L70/TM-21) |
| FCC | Meets FCC Title 47, Part 15 Class B |
| Min. Start Temp | -30 °C |
| Max. Operating Temp | 30 °C |
| Warranty | 5 year warranty |
| Labels | cCSAus Damp location listed ENERGY STAR® qualified Meets California Title 24 JA8-2016 |

Images:



Dimensions:

Diameter: 11"
Height: 4"

Glass
Width: 9-1/16"
Length: 9-1/16"
Height: 3-1/2"

Photometrics:

P350053-009-30

| | |
|------------------------|-------------------------------------|
| ELECTRICAL DATA | P350053-009-30 |
| Input Voltage | 120 V |
| Input Frequency | 60 Hz |
| Input Current | 0.142 A |
| Input Power | 17 |
| Power Factor | Greater than 0.90 |
| THD | <20% |
| FCC | Meets FCC Title 47, Part 15 Class B |
| Operating Temperature | -30 °C to 30 °C |
| Dimming | Yes* |

*See Dimming Notes for more information

P350053-009-30


LED Light Engine: 3000 K 90+
 System Wattage: 17
 Fixture delivered lumens: 1248
 Fixture Efficacy: 71.7
 Spacing Criteria: 1.3

CANDELA DISTRIBUTION

| DEG | CANDELA | LUMENS |
|-----|---------|--------|
| 0 | 364 | |
| 5 | 363 | 35 |
| 15 | 357 | 101 |
| 25 | 339 | 156 |
| 35 | 305 | 190 |
| 45 | 254 | 196 |
| 55 | 194 | 174 |
| 65 | 138 | 137 |
| 75 | 91 | 96 |
| 85 | 55 | 61 |
| 90 | 42 | |
| 95 | 31 | 35 |
| 105 | 18 | 19 |
| 115 | 10 | 10 |
| 125 | 8 | 7 |
| 135 | 5 | 4 |
| 145 | 0 | 0 |
| 155 | 0 | 0 |
| 165 | 0 | 0 |
| 175 | 0 | 0 |
| 180 | 0 | |

ZONAL LUMEN SUMMARY

| ZONE | LUMENS | %FIXT |
|--------|--------|-------|
| 0-30 | 292 | 23.9 |
| 0-40 | 482 | 39.5 |
| 0-60 | 852 | 69.8 |
| 0-90 | 1146 | 93.8 |
| 90-120 | 64 | 5.3 |
| 90-130 | 71 | 5.8 |
| 90-150 | 75 | 6.2 |
| 90-180 | 75 | 6.2 |
| 0-180 | 1221 | 100.0 |

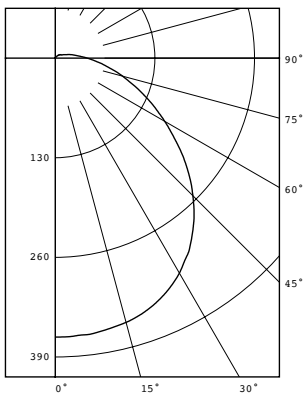

Test **16.02109** Test Date **08/09/16**

P350053-009-30

Dimming Notes:

P350053 is designed to be compatible with many NEMA SSL 7a Phase Cut (forward phase) dimmers as well as many ELV (reverse phase) controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron Diva DVELV-300P

Lutron Nova T NTELV-300

Lutron Caseta

Lutron Ariadni AY-600P

Leviton Illumatech IPI06-1LZ

Lutron Lumea LG-603PG

Leviton SureSlide 6672

Leviton SureSlide 6674

Lutron Ariadni AYCL-153P

Lutron Skylark Contour CTCL-153P

Lutron Diva DVCL-153P

Pass & Seymour Harmony DCL453PTCCCV6

Lutron Toggler TGCL-153P

Lutron Maestro MACL-153M

Lutron Ariadni AYL-600P

Lutron Maestro MA-600

Lutron NOVA T NTLV-600

lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Lutron Renoir II AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.