

LED Flush Mount

 Ceiling mounted • Damp location listed **PROGRESS LED**


P350086-009-30

Description:

Featuring a sleek and slim appearance, Bezel LED is an architectural series of flush mount options. Etched white glass is accented by a metal trim in a metallic finish. The glass shade is illuminated on both the bottom and sides to provide a pleasing lighted effect. 13" LED Flush Mount. Brushed Nickel finish.

Specifications:

- Brushed Nickel (-009) (plated)
- Steel Construction
- Etched white Glass shade
- LED Module is replaceable (part # 93074253)
- Features a sleek and slim appearance inspired by architectural design
- One light LED flush mount
- Popular Brushed Nickel finish
- The glass shade is illuminated on both the bottom and sides to provide a pleasing lighted effect
- Features 25-watt integrated LED to deliver energy savings and reduce long-term maintenance costs
- 1770 lumens, 70 lumens per watt (source)
- 3000K color temperature, 90CRI
- ENERGY STAR certified
- California JA8 certified.
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

Performance:

Number of Modules	1
Input Power	25w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1770/70 (LM-82)
Lumens/LPW (Delivered)	921/37 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30°C
Warranty	5 year limited warranty
Labels	cCSAus Damp location listed ENERGY STAR® qualified Meets California Title 24 JA8-2016

Images:



Dimensions:

Diameter: 13"
Height: 3-7/8"

Glass
Width: 12-1/4"
Height: 2-7/8"

Photometrics:

P350086-009-30

ELECTRICAL DATA	P350086-009-30
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.208 A
Input Power	25
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30°C
Dimming	Yes*

*See Dimming Notes for more information

P350086-009-30


LED Light Engine: 3000 K 90 CRI
 System Wattage: 25
 Fixture delivered lumens: 921
 Fixture Efficacy: 37
 Spacing Criteria: 1.4

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	196	
5	196	19
15	195	55
25	188	87
35	175	110
45	157	121
55	135	121
65	108	107
75	78	82
85	48	53
90	37	
95	36	39
105	33	35
115	30	30
125	25	22
135	20	15
145	14	9
155	7	3
165	2	1
175	0	0
180	0	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	161	17.7
0-40	270	29.7
0-60	512	56.4
0-90	755	83.0
90-120	104	11.5
90-130	127	13.9
90-150	151	16.6
90-180	155	17.0
0-180	909	100.0

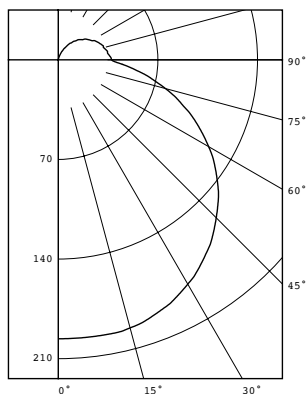

Test 18.00006 Test Date 01/08/18

P350086-009-30**Dimming Notes:**

P350086 is designed to be compatible with many Triac/Forward Phase or ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron Diva DVELV-300P

Lutron Nova T NTELV-300

Lutron Caseta

Lutron Ariadni AY-600P

Lutron Lumea LG-603PG

Leviton SureSlide 6672

Leviton SureSlide 6674

Lutron Ariadni AYCL-153P

Lutron Skylark Contour CTCL-153P

Lutron Diva DVCL-153P

Cooper Devine AL DAL06P

Lutron Maestro MACL-153M

Lutron Ariadni AYL-600P

Lutron Maestro MA-600

Lutron NOVA T NTLV-600

lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Lutron Nova N-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.