

LED Flush Mount

 Ceiling mounted • Damp location listed **PROGRESS LED**


P350100-020-30

Description:

The 11 inch LED Flush mount offers traditional form factor for ambient illumination. The etched glass dominates the design with its distinctive and sculptural bowl. The elegant glass is paired with a metallic frame in a Antique Bronze finish.

Specifications:

- Antique Bronze (-020) (painted)
- Steel Construction
- Etched Glass globe
- LED Module is replaceable (part # 93074039)
- LED Flush mount offers traditional form factor for ambient illumination
- The etched glass dominates the design with its distinctive and sculptural bowl
- Popular Antique Bronze finish
- The elegant glass is paired with a metallic frame
- A natural choice for closets, hallways and smaller areas within the home
- Features 17-watt integrated LED to deliver energy savings and reduce long-term maintenance costs
- 1276 lumens, 73 lumens per watt (source)
- 3000K color temperature, 90CRI
- ENERGY STAR certified
- California JA8 certified.
- Dimmable to 10% brightness (See Dimming Notes)
- Ceiling pan covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

Performance:

Number of Modules	1
Input Power	17w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1276/73 (LM-82)
Lumens/LPW (Delivered)	1053/59.5 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Warranty	5 year limited warranty
Labels	cCSAus Damp location listed ENERGY STAR® qualified Meets California Title 24 JA8-2016

Images:



Dimensions:

 Diameter: 11"
 Height: 4-1/4"

 Glass
 Width: 10"
 Height: 3-1/4"

Photometrics:

P350100-020-30

ELECTRICAL DATA	P350100-020-30
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.142 A
Input Power	17
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30°C
Dimming	Yes*

*See Dimming Notes for more information

P350100-020-30


LED Light Engine: 3000 K 90 CRI
 System Wattage: 17
 Fixture delivered lumens: 1053
 Fixture Efficacy: 59.5
 Spacing Criteria: 1.2

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	329	
5	328	31
15	311	88
25	281	130
35	244	153
45	201	155
55	156	140
65	113	112
75	75	80
85	45	49
90	33	
95	24	27
105	12	13
115	6	6
125	3	3
135	0	0
145	0	0
155	0	0
165	0	0
175	0	0
180	0	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	248	25.2
0-40	401	40.7
0-60	696	70.5
0-90	937	95.0
90-120	46	4.7
90-130	49	5.0
90-150	49	5.0
90-180	49	5.0
0-180	986	100.0

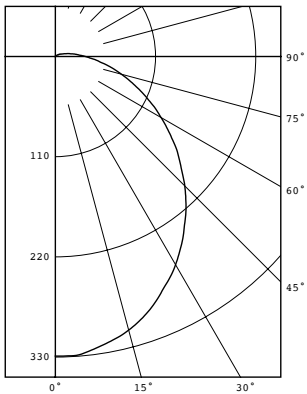

Test 17.02224 Test Date 08/16/17

P350100-020-30**Dimming Notes:**

P350100 is designed to be compatible with many Triac/Forward Phase or ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron Diva DVELV-300P

Lutron Nova T NTELV-300

Lutron Caseta

Lutron Ariadni AY-600P

Leviton Illumatech IPI06-1LZ

Lutron Lumea LG-603PG

Leviton SureSlide 6672

Leviton SureSlide 6674

Lutron Ariadni AYCL-153P

Lutron Skylark Contour CTCL-153P

Lutron Diva DVCL-153P

Pass & Seymour Harmony DCL453PTCCCV6

Lutron Toggler TGCL-153P

Lutron Maestro MACL-153M

Lutron Ariadni AYL-600P

Lutron Maestro MA-600

Lutron NOVA T NTLV-600

Lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Lutron Renoir II AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.