

Two-Light Flush Mount

 Ceiling flush mounted • Damp location listed **PROGRESS LED**


Description:

Two-light 16" LED flush mount combines a linen drum shade with a linen glass diffuser. 120V AC replaceable LED module, 1,211 Lumens 71.2 lumens/watt per module (source), 3000K color temperature and 90+ CRI. Antique Bronze finish.

Specifications:

- Antique Bronze (-20) (painted)
- Steel Construction
- Off-White linen drum shade, Linen glass diffuser
- LED Module is replaceable (part # 93053641)
- Linen drum shade.
- Linen glass diffuser.
- Replaceable LED module.
- Dimmable to 10% with many ELV dimmers
- 1,211 lumens 71.2 lumens/watt per module (source)
- 3000K color temperature, 90+ CRI.
- Dimmable to 10% brightness (See Dimming Notes)
- Ceiling pan covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- ENERGY STAR® qualified

Performance:

Number of Modules	2
Input Power	17w per module
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1211/71.2 (LM-82) per module
Lumens/LPW (Delivered)	1178/36 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30 °C
Warranty	5 year warranty
Labels	cCSAus Damp location listed ENERGY STAR® qualified

P3611-2030K9

Images:



Dimensions:

Diameter: 16"
Height: 4"

Glass
Width: 15-7/8"
Height: 1-3/4"
Glass 2
Width: 15-5/16"
Height: 1-3/8"

Photometrics:

P3611-2030K9

ELECTRICAL DATA	P3611-2030K9
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.283 A
Input Power	17
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*

*See Dimming Notes for more information

P3611-2030K9


LED Light Engine: 3000 K 90 CRI
 System Wattage: 17
 Fixture delivered lumens: 1178
 Fixture Efficacy: 36
 Spacing Criteria: 1.3

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	381	
5	380	36
15	369	104
25	345	159
35	311	194
45	265	205
55	211	188
65	149	147
75	85	90
85	36	41
90	20	
95	10	13
105	0	1
115	0	0
125	0	0
135	0	0
145	0	0
155	0	0
165	0	0
175	0	0
180	0	0

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	299	25.4
0-40	494	41.9
0-60	887	75.2
0-90	1165	98.9
90-120	13	1.1
90-130	13	1.1
90-150	13	1.1
90-180	13	1.1
0-180	1178	100.0

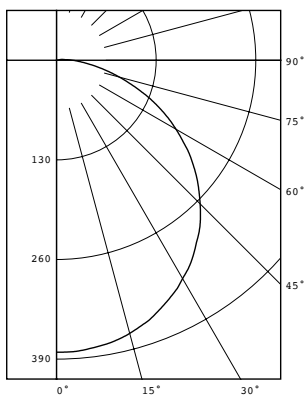

Test 15.00754 Test Date 05/11/15

P3611-2030K9

Dimming Notes:

P3611 is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron	Nova T	NTELV-300
Lutron	Vierti	VTELV-600
Lutron	Maestro	MAELV-600
Lutron	spacer/system	SPSELV-600
Leviton	Renoir II	AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.