

One-Light Flush Mount W/HAL AC LED Module Ceiling mounted • Damp location listed



P3632-0930K9

Description:

Industrial style LED flush mount adorned with industrial-inspired accents and white acrylic diffuser. One-light 29W LED 3000K, 90+ CRI in a Brushed Nickel finish.

Specifications:

- Brushed Nickel (-09) (plated)
- Steel Construction
- White acrylic diffuser
- LED Module is replaceable (part # 1911098)
- Industrial style inspired.
- White acrylic diffuser.
- Brushed Nickel finish.
- Dimmable to 10% with many ELV dimmers
- 2,197 lumens 71.2 lumens/watt (source)
- 3000K color temperature, 90+ CRI.
- Dimmable to 10% brightness (See Dimming Notes)
- Chassis covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- ENERGY STAR® qualified

Performance:

Number of Modules	1
Input Power	29w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	2197/75.8 (LM-82)
Lumens/LPW (Delivered)	875/30.1 (LM-79)
CCT	3000 K
CRI	90+
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30 °C
Warranty	5 year warranty
Labels	cCSAus Damp location listed ENERGY STAR® qualified

Images:



Dimensions:

Diameter: 13"
Height: 2-1/2"

Glass
Width: 12"
Length: 12"
Height: 0.25"

Photometrics:

P3632-0930K9

ELECTRICAL DATA	P3632-0930K9
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.242 A
Input Power	29
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*

*See Dimming Notes for more information

P3632-0930K9


LED Light Engine: 3000 K 90+
 System Wattage: 29
 Fixture delivered lumens: 875
 Fixture Efficacy: 30.1
 Spacing Criteria: 1.27

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	303	
5	301	29
15	291	82
25	272	125
35	243	152
45	207	159
55	163	146
65	113	112
75	59	63
85	11	14
90	0	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	236	26.8
0-40	389	44.1
0-60	694	78.6
0-90	882	100.0
90-180	0	0.0
0-180	882	100.0

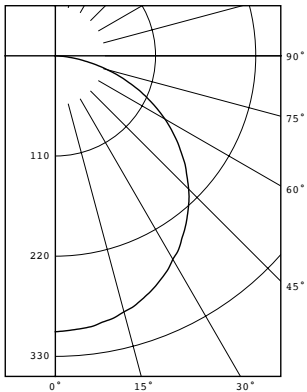

P3632-0930K9

Dimming Notes:

P3632 is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron Nova T NTELV-300

Lutron Vienti VTELV-600

Lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Leviton Renoir II AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.