

One-Light Pendant

 Ceiling chain or stem mounted • Damp location listed **PROGRESS LED**


Description:

The one-light 12" pendant features industrial roots in both form and function. The Oil Brushed Nickel finish highlight the high-quality prismatic glass which adds to the historical aesthetic. Antique style fixture includes a hinge-locking nautical design. Perfect above a kitchen island in pairs or threes, use for additional ambience or task lighting in, breakfast nooks, islands, offices, and dining rooms or anywhere a pendant light can be placed. 3000k, 90+ CRI 1,211 lumens 71.2 lumens/watt per module (source).

Specifications:

- Brushed Nickel (-09) (plated)
- Steel Construction
- Clear Fresnel glass lens
- LED Module is replaceable (part # 93053641)
- Brushed Nickel finish.
- Fresnel glass lens.
- Antique inspired with industrial roots
- Includes two 6", one 12", two 15" stems and 6 links of chain.
- Dimmable to 10% with many ELV dimmers
- 1,211 lumens 71.2 lumens/watt per module (source)
- 3000K color temperature, 90+ CRI.
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 10 feet of wire supplied
- Two 6", one 12", two 15" lengths of stem included
- Six links of 9 gauge chain supplied
- ENERGY STAR® qualified

Performance:

Number of Modules	1
Input Power	17w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1211/71.2 (LM-82)
Lumens/LPW (Delivered)	777/48.3 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30 °C
Warranty	5 year warranty
Labels	cCSAus Damp location listed ENERGY STAR® qualified

P5188-0930K9

Images:



Dimensions:

Diameter: 12-1/8"
 Height: 10-1/2"
 Overall Ht. W/Stem: 76-1/2"

Glass
 Width: 10-1/16"
 Length: 10-1/16"
 Height: 1"

Photometrics:

P5188-0930K9

ELECTRICAL DATA	P5188-0930K9
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.142 A
Input Power	17
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*

*See Dimming Notes for more information

P5188-0930K9


LED Light Engine: 3000 K 90 CRI
System Wattage: 17
Fixture delivered lumens: 777
Fixture Efficacy: 48.3
Spacing Criteria: 0.9

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	455	
5	401	38
15	369	103
25	300	140
35	239	154
45	209	157
55	121	109
65	51	52
75	17	19
85	4	5
90	0	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	281	36.2
0-40	435	55.9
0-60	701	90.2
0-90	777	100.0
90-180	0	0.0
0-180	777	100.0

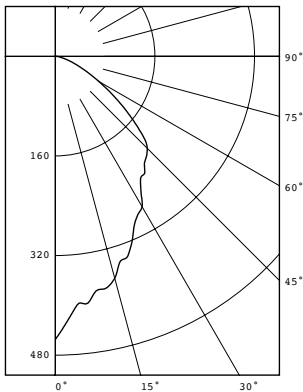

Test 8888 Test Date 04/10/14

P5188-0930K9

Dimming Notes:

P5188 is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron Nova T NTELV-300

Lutron Vienti VTELV-600

Lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Leviton Renoir II AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.