

Wall Lantern

 Wall mounted • Wet location listed **PROGRESS LED**


Description:

Z-1060 presents a functional design with a modern sensibility. Architectural style housing is die-cast for added durability. The glass diffuser is secured without visible fasteners for an overall clean appearance. LED source delivers both energy efficiency and maintenance-free operation.

Specifications:

- Black (-031) (painted)
- Aluminum construction
- Etched Opal Glass diffuser
- One light LED wall lantern
- One 9W LED module
- Features 3000K and warm white color, 90 CRI
- 624 lumens, 66 lumens per watt (source)
- A functional design with a modern sensibility
- Architectural style housing is die-cast for added durability
- The glass diffuser is secured without visible fasteners for an overall clean appearance
- LED source delivers both energy efficiency and maintenance-free operation
- Textured Black finish with etched opal glass
- Dimmable to 10% brightness (See Dimming Notes)
- Back plate covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

Performance:

Number of Modules	1
Input Power	9w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	624/66 (LM-82)
Lumens/LPW (Delivered)	236/25.7 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30°C
Warranty	5 year limited warranty
Labels	cCSAus Wet location listed ENERGY STAR® qualified Meets California Title 24 JA8-2016

P560072-031-30

Images:



Dimensions:

Width: 4-1/2"
Depth: 4-3/4"
Height: 4-1/2"
H/CTR: 2-1/4"

Glass
Width: 3-1/2"
Height: 3-1/4"

Photometrics:


P560072-031-30

ELECTRICAL DATA	P560072-031-30
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.075 A
Input Power	9
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30°C
Dimming	Yes*

*See Dimming Notes for more information

P560072-031-30

LED Light Engine: 3000 K 90 CRI
 System Wattage: 9
 Fixture delivered lumens: 236
 Fixture Efficacy: 25.7
 Spacing Criteria: 1.85

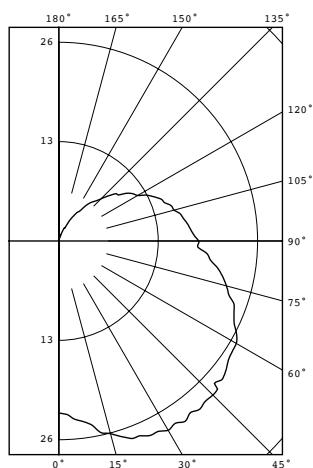

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	22.5	
5	23.4	2
15	26.1	7
25	28.1	13
35	28.8	18
45	28.5	22
55	27.1	24
65	25.3	25
75	22.7	24
85	19.5	21
90	18.3	
95	17.3	19
105	15.6	17
115	13.7	14
125	10.9	10
135	7.8	6
145	4.8	3
155	1.9	1
165	0.7	0
175	0.1	0
180	0.1	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	23	10.0
0-40	41	17.9
0-60	87	38.3
0-90	157	69.4
90-120	49	21.7
90-130	59	25.9
90-150	68	30.1
90-180	69	30.6
0-180	227	100.0

Test 17.01615 Test Date 06/07/17

P560072-031-30**Dimming Notes:**

P560072 is designed to be compatible with many Triac/Forward Phase or ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron Diva DVELV-300P

Lutron Nova T NTELV-300

Lutron Caseta

Lutron Ariadni AY-600P

Leviton Illumatech IPI06-1LZ

Leviton SureSlide 6672

Lutron Ariadni AYCL-153P

Lutron Skylark Contour CTCL-153P

Lutron Diva DVCL-153P

Lutron Toggler TGCL-153P

Lutron Maestro MACL-153M

Lutron Ariadni AYL-600P

Lutron NOVA T NTLV-600

lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Lutron Renoir II AWRMG-EAW

Lutron Nova N-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.