

Z-2010 LED

Wall Mounted • Wet Location Listed PROGRESS LED



Description:

Experience a one-of-a-kind lighting experience with this LED wall sconce. This other worldly light fixture features a circle within a circle structure mimicking the design of planets circling in our solar system. When illuminated, the wall light produces a stunning eclipse-inspired glow much like when the moon quietly passes in front of the Sun.

Specifications:

- Etched glass Shade
- Experience a one-of-a-kind lighting experience with this LED wall sconce.
- This other worldly light fixture features a circle within a circle structure mimicking the design of planets circling in our solar system.
- When illuminated, the wall light produces a stunning eclipse-inspired glow much like when the moon quietly passes in front of the Sun.
- Ideal for any hallway, foyer, bathroom, foyer, sitting room, living room, or stairway.
- Perfect for transitional, modern, or contemporary settings.
- Measures 12-inch width by 12-inch height.
- Uses one LED module (9w max).
- Compatible with many Triac/ELV dimmers (see dimming controls)
- Includes installation instructions and mounting hardware.
- Progress Lighting products are designed for exceptional quality, reliability, and functionality.
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" recessed outlet box: 4.75 in W., 0.75 in ht., 4.75 in depth
- Mounting strap for outlet box included
- 6 in of wire supplied
- Americans With Disabilities Act (ADA) compliant

Performance:

Number of Modules	1 Wall Brackets
Input Power	9 W
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	670/71 (LM-82)
CCT	3000 K
CRI	90 CRI
Life (hours)	60000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15, Class B
Warranty	5-year Limited Warranty
Labels	cCSAus Wet Location Listed
	ENERGY STAR® qualified
	Meets California Title 24 JA8-2016

P560132-108-30



Dimensions:

Width: 12 in
 Height: 12 in
 Depth: 2-1/88 in
 H/CTR: 6 in

Etched glass Shade
 Width: 3-1/2 in
 Height: 3-1/2 in


Photometrics:

P560132-108-30

ELECTRICAL DATA	P560132-108-30
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.079
Power Factor	Greater than 0.90
THD	<20%
EMI/RFI	FCC Title 47, Part 15, Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*
Over-voltage, over-current, short-circuit protected	
*See Dimming Notes for more information	

P560132-108-30

LED Light Engine: 3000 K 90 CRI
 System Wattage: 9
 Fixture delivered lumens: 88
 Fixture Efficacy: 9.3
 Spacing Criteria:

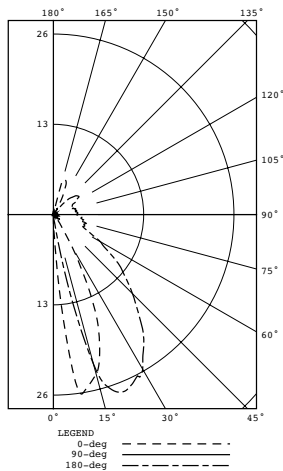

Test 19.01082 Test Date 06/17/19

CANDELA DISTRIBUTION

CANDELA	DISTRIBUTION					FLUX
CANDELA	DISTRIBUTION	DISTRIBUTION	DISTRIBUTION	DISTRIBUTION	DISTRIBUTION	
0.0	45.0	90.0	135.0	180.0		
0	0.2	0.2	0.2	0.2	0.2	
5	13.1	7.1	0.1	0.2	0.5	0.5
15	23.8	25.8	0.4	6.3	22.3	4.1
25	12.6	21.0	0.0	25.1	26.9	7.8
35	1.8	12.6	0.2	26.9	22.7	9.1
45	0.9	4.1	0.3	25.2	16.1	9.4
55	0.6	1.5	0.5	22.4	10.3	9.3
65	0.0	0.4	0.2	19.0	5.3	8.2
75	0.4	0.9	0.7	17.6	4.9	7.7
85	0.0	0.6	0.5	15.7	4.1	7.0
90	0.0	0.5	0.3	15.1	3.3	
95	0.0	0.5	0.5	14.8	3.5	6.3
105	0.0	0.5	0.3	14.2	3.3	5.4
115	0.1	0.6	0.4	11.7	3.0	4.6
125	0.6	0.8	0.3	6.2	4.5	3.5
135	0.4	2.0	0.2	1.7	3.3	2.1
145	1.0	6.3	0.0	0.8	1.1	1.4
155	3.6	6.4	0.0	0.4	0.4	1.1
165	5.1	3.3	0.1	0.7	0.4	0.4
175	0.0	0.1	0.1	0.1	0.1	0.0
180	0.0	0.0	0.0	0.0	0.0	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	12.4	14.1
0-40	21.6	24.5
0-60	40.2	45.7
0-90	63.2	71.8
90-120	16.3	18.5
90-130	19.8	22.5
90-150	23.2	26.4
90-180	24.8	28.2
0-180	88.0	100.0

Dimming Notes:

P560132-108-30 is designed to be compatible with many Triac/ELV controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls:

Lutron Diva DVELV-300P

Lutron Nova T NTELV-300

Lutron Caseta

Lutron Ariadni AY-600P

Leviton Illumatech IPI06-1LZ

Leviton SureSlide 6672

Lutron Ariadni AYCL-153P

Lutron Skylark Contour CTCL-153P

Lutron Diva DVCL-153P

Lutron Toggler TGCL-153P

Lutron Maestro MACL-153M

Lutron Ariadni AYLV-600P

Lutron NOVA T NTLV-600

lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Lutron Renoir II AWRMG-EAW

Lutron Nova N-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.

P560132-108-30