

# One-Light Wall Sconce W/HAL AC LED Module

Wall mounted • Wet location listed



## Description:

Modern geometric outdoor LED sconces are designed to complement a range of residential and commercial architectural styles. ADA compliant. 9w LED is 3000K, 90+ CRI in an Antique Bronze cast aluminum shade. Dark Sky compliant.

## Specifications:

- Antique Bronze (-20) (painted)
- Cast aluminum Construction
- Antique Bronze cast aluminum shade, White acrylic Diffuser
- LED Module is replaceable (part # 93054049)
- Modern geometric outdoor LED sconces.
- Designed to complement a range of residential and commercial architectural styles.
- Dark Sky compliant.
- 623 lumens 69.2 lumens/watt per module (source)
- 3000K color temperature, 90+ CRI.
- Dimmable to 10% brightness (See Dimming Notes)
- Unit covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- Complies with "Americans with Disabilities Act" - ADA
- ENERGY STAR® qualified
- Meets California Title 24 high efficacy requirements for outdoor use only

## Performance:

Number of Modules	1
Input Power	9w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Delivered)	388/49.7 (LM-79)
CCT	3000 K
CRI	90+
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30 °C
Warranty	5 year warranty
Labels	cCSAus Wet location listed ENERGY STAR® qualified Meets California Title 24 high efficacy requirements for outdoor use only

## P5634-2030K9

## Images:



## Dimensions:

Width: 5-1/4"  
Depth: 4"  
Height: 4-3/4"  
H/CTR: 2-3/8"

Glass  
Width: 4-1/16"  
Length: 5-3/16"  
Height: 4-11/16"  
Glass 2  
Width: 2-7/8"  
Length: 2-7/8"  
Height: 0-11/16"

**Photometrics:**

## P5634-2030K9

<b>ELECTRICAL DATA</b>	<b>P5634-2030K9</b>
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.075 A
Input Power	9
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*

\*See Dimming Notes for more information

**P5634-2030K9**


LED Light Engine: 3000 K 90+  
 System Wattage: 9  
 Fixture delivered lumens: 388  
 Fixture Efficacy: 49.7  
 Spacing Criteria: 1.3

**CANDELA DISTRIBUTION**

DEG	CANDELA	LUMENS
0	148	
5	147	14
15	143	40
25	135	62
35	121	76
45	101	78
55	74	66
65	40	40
75	10	11
85	0	0
90	0	

**ZONAL LUMEN SUMMARY**

ZONE	LUMENS	%FIXT
0-30	117	30.1
0-40	192	49.6
0-60	336	86.6
0-90	388	100.0
90-180	0	0.0
0-180	388	100.0

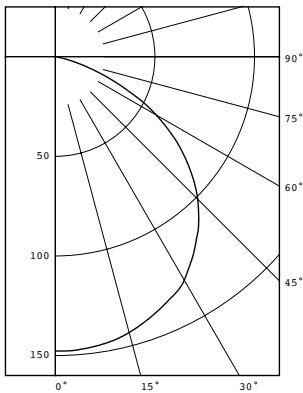

**P5634-2030K9****Dimming Notes:**

---

P5634 is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

**Dimming Controls**

---

Lutron Nova T NTELV-300

Lutron Vierti VTELV-600

Lutron Ariadni AYCL-153P

Lutron Diva DVCL-153P

Lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Leviton Renoir II AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.