


Incandescent

Complete SquaresNon-IC

Recessed

Type -30**TG** P6414 □

| | Finish | | Dimensions (Inches) | | | |
|-------------|--------|------------|-----------------------|--------|-------|-------|
| Catalog No. | White | Lamping | Α | В | С | D |
| P6414 | -30TG | 1 (m) 100w | 8 | 14-1/4 | 4-1/4 | 9-1/2 |
| | | | Ceiling opening 8-1/8 | | | |

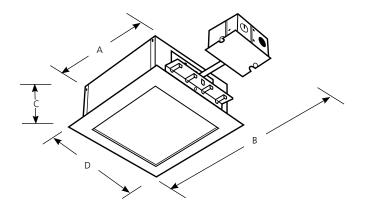

Specifications:

Wiring

- Universal junction box with snap out sides
- Grounding pigtail
- 1/2" & 3/4" knock outs for rigid or BX fittings

Construction

- Steel construction throughout
- Maximum ceiling thickness is 1"
- Four clips furnished for ceiling installation
- Outlet box assembly removable from inside unit for electrical inspection

Bar Hangers

- Must be ordered separately (P8716-01)
- 26" bar hangers span 24" T-bar spacing

Electrical

- Medium based porcelain socket with nickel plated brass screw shell
- Socket mounted in fixed position
- Pre-wired

Labeling

- Non-IC rated
- UL-CUL listed for damp locations

Trim

- Steel construction, painted white
- Flat white glass
- Trim installs with torsion springs and fits tight to ceiling

Progress Lighting Post Office Box 5704 Spartanburg, South Carolina 29304-5704