

36 IN LINEAR UNDERCABINET Undercabinet mounted • Damp location listed **PROGRESS LED**



P700004-020-30

Description:

The HIDE-A-LITE V 35-1/2" linear undercabinet fixture provides the ideal solution for residential and light commercial applications. Extruded aluminum construction featuring a lens design to optimize light distribution to ensure proper illumination. The HIDE-A-LITE V series utilizes a simple mounting method, and direct wiring, for a hassle free installation. Energy efficient and functional lighting, which can be dimmed down to 10 percent with many Forward Phase Triac and Electronic Low Voltage ELV dimmers. 9" linear undercabinet fixture. Antique Bronze powder coat finish.

Specifications:

- Antique Bronze (-020) (Powder Coat)
- Aluminum Construction, plastic Construction
- White polycarbonate diffuser
- 36" linear undercabinet fixture
- Antique Bronze powder coat finish
- Extruded aluminum construction
- Angled lens design to ensure proper illumination
- Integral ON/OFF switch
- Dimmable to 10% with many Forward Phase (Triac) or Electronic Low Voltage (ELV) dimmers
- Damp location listed
- Dimmable to 10% brightness (See Dimming Notes)
- 6" of wire supplied
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

Performance:

Input Power	21.1w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Delivered)	1517/72 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	50,000 (L70/TM-21)
FCC	FCC Title 47, Part 15, Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30°C
Warranty	5 year warranty
Labels	cETLus Damp location listed
	ENERGY STAR® qualified
	Meets California Title 24 JA8-2016

Images:



Dimensions:

Width: 3.27"
 Length: 35-1/2"
 Height: 1.16"

Photometrics:


P700004-020-30

ELECTRICAL DATA	P700004-020-30
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.177 A
Input Power	21.1
Power Factor	Greater than 0.90
THD	<20%
FCC	FCC Title 47, Part 15, Class B
Operating Temperature	-30 °C to 30°C
Dimming	Yes*

*See Dimming Notes for more information

P700004-020-30

LED Light Engine: 3000 K 90 CRI
System Wattage: 21.1
Fixture delivered lumens: 1517
Fixture Efficacy: 72
Spacing Criteria: 0.96

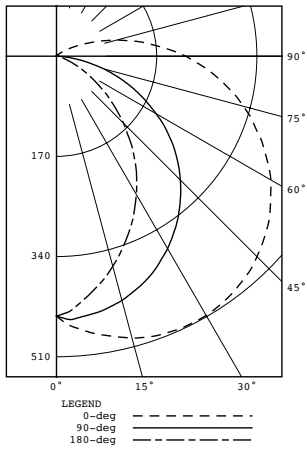

Test 17.02425 Test Date 09/05/17

CANDELA DISTRIBUTION

CANDELA	DISTRIBUTION			FLUX		
	0.0	45.0	90.0	135.0	180.0	
0	441	441	441	441	441	
5	465	455	445	424	423	42
15	495	470	429	381	369	120
25	508	468	398	326	306	183
35	503	450	353	262	236	223
45	481	416	297	190	161	235
55	443	369	232	118	90	219
65	391	313	158	54	37	182
75	328	247	83	13	10	135
85	257	172	16	1	2	89
90	219	135	0	0	1	
95	178	100	0	0	0	51
105	106	41	0	0	0	25
115	47	11	0	0	0	9
125	16	3	0	0	0	3
135	4	1	0	0	0	1
145	1	1	0	0	0	0
155	0	0	0	0	0	
165	0	0	0	0	0	
175	0	0	0	0	0	0
180	0	0	0	0	0	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	345	22.8
0-40	568	37.5
0-60	1022	67.4
0-90	1428	94.1
90-120	85	5.6
90-130	88	5.8
90-150	89	5.9
90-180	89	5.9
0-180	1517	100.0

P700004-020-30

Dimming Notes:

P700004 is designed to be compatible with many Triac/Forward Phase or ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron NTELV-300

Lutron DELV-300P

Lutron DVCL-253P

Lutron Caseta

Leviton 6681

Leviton 6674

Lutron AYCL-153P

Lutron TGCL-153PH

Lutron AYLV-600P

Lutron NTLV-600

Lutron MAELV-600

Lutron N-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.