

One-Light Sconces

 Wall mounted • Damp location listed **PROGRESS LED**


P7093-3030K9

Description:

One-light LED Wall Sconce with a Satin Opal glass diffuser and replaceable LED Module in a White finish.

Specifications:

- White (-30) (painted)
- Steel Construction
- Satin Opal glass diffuser
- LED Module is replaceable (part # 93053641)
- White finish.
- Satin opal glass.
- Replaceable LED module.
- Dimmable to 10% with many ELV dimmers
- 1,211 lumens 71.2 lumens/watt per module (source)
- 3000K color temperature, 90+ CRI.
- Dimmable to 10% brightness (See Dimming Notes)
- Back plate covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- Complies with "Americans with Disabilities Act" - ADA
- ENERGY STAR® qualified

Performance:

Number of Modules	1
Input Power	17w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1211/71.2 (LM-82)
Lumens/LPW (Delivered)	818/50.2 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30 °C
Warranty	5 year warranty
Labels	cCSAus Damp location listed ENERGY STAR® qualified

Images:



Dimensions:

Width: 11-3/8"
 Depth: 3-3/8"
 Height: 11-1/8"
 H/CTR: 5-1/16"

Photometrics:

P7093-3030K9


ELECTRICAL DATA	P7093-3030K9
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.142 A
Input Power	17
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*

*See Dimming Notes for more information

P7093-3030K9

LED Light Engine: 3000 K 90 CRI
 System Wattage: 17
 Fixture delivered lumens: 818
 Fixture Efficacy: 50.2

Spacing Criteria:

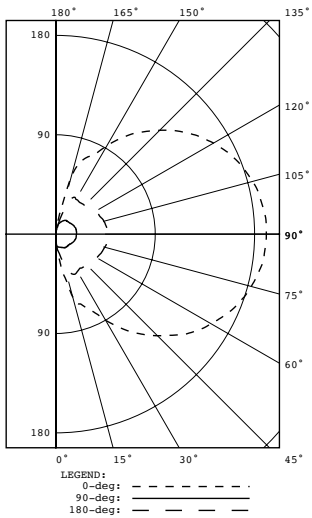

Test 15.00950 Test Date 06/15/15

CANDELA DISTRIBUTION

CANDELA	DISTRIBUTION			FLUX		
	0.0	45.0	90.0	135.0	180.0	
0	9	9	9	9	9	
5	15	12	11	13	13	1
15	59	35	12	19	28	8
25	77	56	13	27	40	18
35	104	70	15	34	38	31
45	130	89	15	41	40	45
55	154	105	16	46	41	60
65	171	117	17	50	44	74
75	183	127	18	53	46	84
85	190	131	19	54	47	89
90	191	132	19	54	47	
95	190	132	19	54	47	89
105	185	128	19	52	45	84
115	173	120	18	50	43	74
125	156	108	17	46	40	61
135	133	93	16	40	37	45
145	107	74	15	33	36	31
155	79	59	13	23	36	18
165	54	36	10	11	13	6
175	0	1	2	1	1	0
180	0	0	0	0	0	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	28	3.4
0-40	58	7.1
0-60	163	19.9
0-90	409	50.0
90-120	247	30.2
90-130	308	37.7
90-150	384	47.0
90-180	409	50.0
0-180	818	100.0



P7093-3030K9

Dimming Notes:

P7093 is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron	Nova T	NTELV-300
Lutron	Vierti	VTELV-600
Lutron	Maestro	MAELV-600
Lutron	spacer/system	SPSELV-600
Leviton	Renoir II	AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.