

LED Etched Glass Sconce

Wall Mounted • Damp Location Listed PROGRESS LED



Description:

Invite the luxurious demeanor of this angelic wall sconce to illuminate your home with a divine ambiance. A dainty, etched glass shade is crafted in an elongated cup-like shape. The shade is held in place by a beautiful black frame sure to look stunning in your home decor design.

Specifications:

- Etched glass Shade
- Invite the luxurious demeanor of this angelic wall sconce to illuminate your home with a divine ambiance.
- A dainty, etched glass shade is crafted in an elongated cup-like shape.
- The shade is held in place by a beautiful black frame sure to look stunning in your home decor design.
- Ideal for any bathroom, hallway, foyer, or stairway.
- Perfect for transitional, modern, or contemporary settings.
- Measures 6-inch width by 11-inch height.
- Uses one LED module (9w max).
- Compatible with many Triac/ELV dimmers (see dimming controls)
- Includes installation instructions and mounting hardware.
- Progress Lighting products are designed for exceptional quality, reliability, and functionality.
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" recessed outlet box: 6 in W., 9.87 in ht., 0.312 in depth
- Mounting plate for outlet box included
- 6 in of wire supplied
- Americans With Disabilities Act (ADA) compliant

Performance:

Number of Modules	1
Input Power	9 W
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	624/66 (LM-82)
CCT	3000 K
CRI	90 CRI
Life (hours)	60000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15, Class B
Warranty	5-year Limited Warranty
Labels	cCSAus Damp Location Listed
	ENERGY STAR® qualified
	Meets California Title 24 JA8-2016


P710079-031-30



Dimensions:

Width: 6 in
 Height: 11 in
 Depth: 4 in
 H/CTR: 3-1/2 in

Etched glass Shade
 Width: 5-3/4 in
 Height: 10-5/16 in

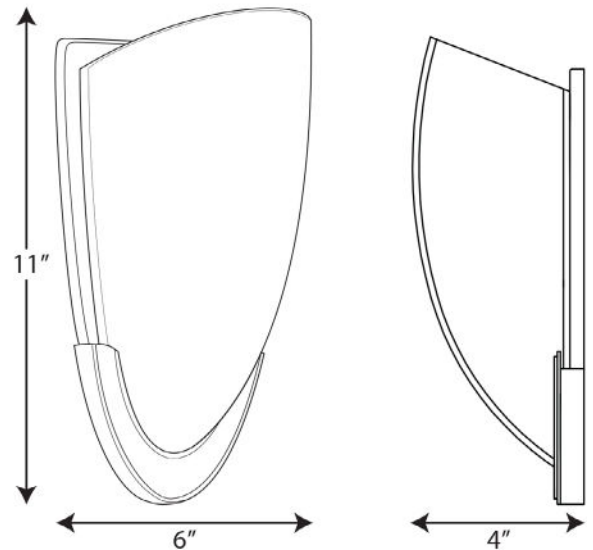


Photometrics:

P710079-031-30

ELECTRICAL DATA	P710079-031-30
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.078
Power Factor	Greater than 0.90
THD	<20%
EMI/RFI	FCC Title 47, Part 15, Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*
Over-voltage, over-current, short-circuit protected	
*See Dimming Notes for more information	

P710079-031-30

LED Light Engine: 3000 K 90 CRI
 System Wattage: 9
 Fixture delivered lumens: 335
 Fixture Efficacy: 35.8
 Spacing Criteria: 3.44 | 2.86 | 0.35

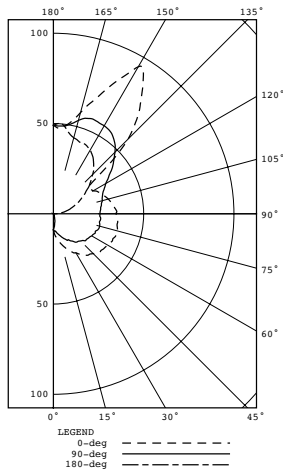

Test 19.00716 Test Date 04/24/19

CANDELA DISTRIBUTION						
CANDELA	DISTRIBUTION					
CANDELA	DISTRIBUTION					
0.0	45.0	90.0	135.0	180.0		
0	8.9	8.9	8.9	8.9	8.9	
5	12.4	11.6	9.8	7.8	6.8	1
15	17.6	15.7	12.1	6.5	2.7	3
25	23.0	20.7	15.5	6.8	1.2	6
35	27.4	25.1	18.5	6.8	0.0	10
45	31.2	28.8	21.3	6.8	0.0	14
55	33.9	31.9	23.6	6.9	0.0	18
65	35.9	34.3	25.5	7.1	0.3	21
75	36.7	35.5	26.5	7.0	0.0	23
85	35.7	35.1	26.3	6.8	0.1	23
90	34.7	34.2	25.8	7.6	0.7	
95	34.3	34.0	26.3	9.8	4.1	24
105	31.5	32.1	28.1	14.2	9.1	25
115	27.9	29.7	30.7	19.7	15.4	25
125	24.1	29.4	37.9	26.0	22.3	27
135	58.5	53.5	48.2	33.1	30.7	34
145	86.3	69.5	55.3	38.5	38.2	35
155	80.1	72.5	56.6	41.1	42.2	27
165	58.0	58.2	53.5	45.6	43.6	15
175	48.1	48.1	48.8	50.2	50.1	5
180	49.0	49.0	49.0	49.0	49.0	

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXT
0-30	11	3.2
0-40	21	6.2
0-60	53	15.7
0-90	119	35.6
90-120	74	22.0
90-130	100	30.0
90-150	169	50.6
90-180	216	64.4
0-180	335	100.0

**Dimming Notes:**

P710079-031-30 is designed to be compatible with many Triac/ELV controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls:

Lutron Diva DVELV-300P

Lutron Nova T NTELV-300

Lutron Caseta

Lutron Ariadni AY-600P

Leviton Illumatech IPI06-1LZ

Leviton SureSlide 6672

Lutron Ariadni AYCL-153P

Lutron Skylark Contour CTCL-153P

Lutron Diva DVCL-153P

Lutron Toggler TGCL-153P

Lutron Maestro MACL-153M

Lutron Ariadni AYLV-600P

Lutron NOVA T NTLV-600

lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Lutron Renoir II AWRMG-EAW

Lutron Nova N-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.

P710079-031-30