

Eclipse LED

Wall Mounted • Damp Location Listed PROGRESS LED



Description:

This wall sconce offers contemporary styling perfect for residential and commercial settings. A satin white glass shade as been crafted in a captivating half-moon silhouette. The shade is cradled in a beveled brushed nickel metal frame for a classic touch.

Specifications:

- Satin White glass Shade
- A satin white glass shade as been crafted in a captivating half-moon silhouette.
- The shade is cradled in a beveled brushed nickel metal frame for a classic touch.
- This wall sconce offers contemporary styling perfect for residential and commercial settings.
- Ideal for any hallway, foyer, bathroom, sitting room, or stairway.
- Perfect for transitional, modern, or contemporary settings.
- Measures 15-1/2-inch width by 7-1/2-inch height.
- Uses one LED module (17w max).
- Compatible with many Triac/ELV dimmers (see dimming controls)
- Includes installation instructions and mounting hardware.
- Progress Lighting products are designed for exceptional quality, reliability, and functionality.
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" recessed outlet box: 15.25 in W., 7.625 in ht., 1.25 in depth
- 1/8 IP mounting plate for outlet box included
- 6 in of wire supplied
- Americans With Disabilities Act (ADA) compliant

Performance:

Number of Modules	1
Input Power	17 W
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1,276/73 (LM-82)
CCT	3000 K
CRI	90 CRI
Life (hours)	60000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15, Class B
Warranty	5-year Limited Warranty
Labels	cCSAus Damp Location Listed ENERGY STAR® qualified Meets California Title 24 JA8-2016


P710090-009-30



Dimensions:

Width: 15-1/2 in
Height: 7-1/2 in
Depth: 4 in
H/CTR: 3 in

Satin White glass Shade
Width: 12-3/8 in
Height: 6-3/16 in

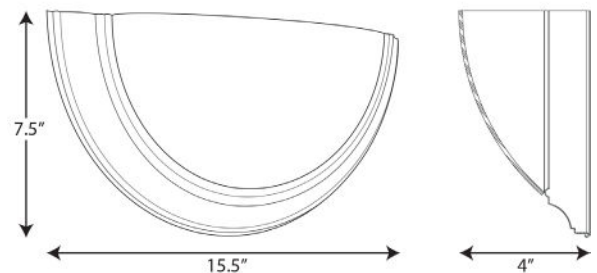

Dimming Notes:

P710090-009-30 is designed to be compatible with many Triac/ELV controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls:

Lutron Diva DVELV-300P

Lutron Nova T NTELV-300

Lutron Caseta

Lutron Ariadni AY-600P

Leviton Illumatech IPI06-1LZ

Lutron Lumea LG-603PG

Leviton SureSlide 6672

Leviton SureSlide 6674

Lutron Ariadni AYCL-153P

Lutron Skylark Contour CTCL-153P

Lutron Diva DVCL-153P

Pass & Seymour Harmony DCL453PTCCCV6

Lutron Toggler TGCL-153P

Lutron Maestro MACL-153M

Lutron Ariadni AYLV-600P

Lutron Maestro MA-600

Lutron NOVA T NTLV-600

lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Lutron Renoir II AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.

P710090-009-30