

## LED CTC COMM

Flush-Mount Mounted • Damp Location Listed PROGRESS LED



### Description:

One-Light Brushed Nickel LED close-to-ceiling. Surface mount oval with clean modern lines and white acrylic diffuser. DC LED light engine with 2649 delivered lumens at 3000K and 90+ CRI.

### Specifications:

- White acrylic Diffuser
- Brushed Nickel finish.
- Steel construction.
- Dimmable to 10% brightness with many Forward and Reverse Phase dimmers.
- 3000k color temperature.
- TM-21 54,000 hour life.
- Meets California Title 24 - JA8 - 2016.
- 2,649 lumens (delivered).
- Dimmable to 10% brightness (See Dimming Notes)
- Ceiling pan covers a standard 4" recessed outlet box: 32.25 in W., 0.375 in ht., 17.875 in depth
- Ceiling pan
- 6 in of wire supplied

### Performance:

Number of Modules	1
Input Power	39 W
Input Voltage	120-277 VAC
Input Frequency	50/60 Hz
Lumens/LPW (Delivered)	2,649/67.9 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	54000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15, Class B
Max. Operating Temp	30 °C
Warranty	5-year Limited Warranty
Labels	ETL Damp Location Listed
	ENERGY STAR® qualified
	Meets California Title 24 JA8-2016


# P7251-0930K9



### Dimensions:

Length: 32-1/2 in  
Width: 18 in  
Height: 4-3/4 in

White acrylic Diffuser  
Width: 16-13/16 in

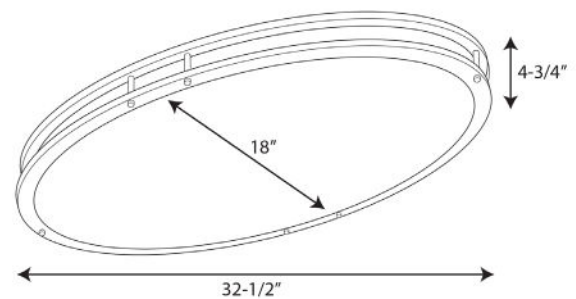



# P7251-0930K9

## Dimming Notes:

---

P7251-0930K9 is designed to be compatible with many Triac/Forward Phase ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

## Dimming Controls:

---

Lutron\_Nova T VTELV-300

Lutron\_Diva DVELV-300P

Lutron\_Caseta Wireless

Leviton\_Renoir II AWRMG-EAW

Lutron\_Nova N-600

Lutron\_Diva DVCL-253P-WH

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.