

# Edgelit 11in Surface Mount

Flush-Mount mounted • Wet location listed



## Description:

The P810016 Edgelit Flush Mount delivers a solution for both residential and commercial markets. The Edgelit technology provides a bright and evenly illuminated surface in a very slim profile. The integrated LED power supply does not protrude into the junction box, allowing for compatibility to 4" octagonal, 4" round shallow and 4" round PVC junction boxes. This surface mounted luminaire measures 11" in diameter with an overall height of 1". In addition, the P810016 is wet location rated, Title 24 – JA8 – 2016 listed, ENERGY STAR listed and is a cost effective solution for fire rated applications (when installed onto a fire rated junction box). The P810016 luminaire combines modern aesthetic, new technology, performance, cost and safety benefits.

## Specifications:

- White (-030) (painted)
- Aluminum/Plastic Construction
- White Polycarbonate round
- Simple installation to steel mounting plate
- Light weight polycarbonate luminaire construction
- Polycarbonate diffuser controls glare and provides an evenly illuminated surface
- Integrated DC LED power supply capable of flicker-free dimming to 10% brightness with many Triac/Forward Phase dimmers (See Dimming Notes)
- Can be installed to 4" octagonal j-box, 4x1/2" round shallow j-box and 4" round PVC j-box
- Suitable for use in clothes closets when installed in accordance with the NEC 410.16 spacing requirements.
- Suitable for use in IC or Non-IC applications
- Dimmable to 10% brightness (See Dimming Notes)
- Fixture covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

## Performance:

Input Power	17w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Delivered)	1325/77 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	50,000 (L70/TM-21)
FCC	FCC Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30°C
Warranty	5 year warranty
Labels	cCSAus Wet location listed
	ENERGY STAR® qualified
	Meets California Title 24 JA8-2016

## P810016-030-30


## Images:



## Dimensions:

Diameter: 11"

Height: 1-1/8"

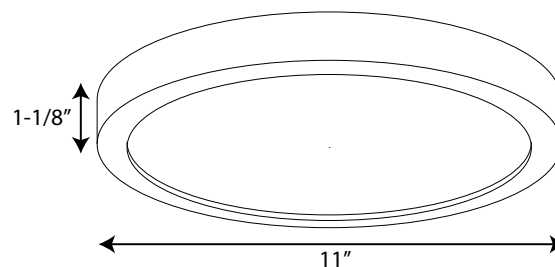

**Photometrics:**

## P810016-030-30

<b>ELECTRICAL DATA</b>	<b>P810016-030-30</b>
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.145 A
Input Power	17
Power Factor	
THD	<20%
FCC	FCC Part 15 Class B
Operating Temperature	-30 °C to 30°C
Dimming	Yes*

\*See Dimming Notes for more information

**P810016-030-30**


LED Light Engine: 3000 K 90  
System Wattage: 17  
Fixture delivered lumens: 1325  
Fixture Efficacy: 77  
Spacing Criteria: 1.25

**CANDELA DISTRIBUTION**

DEG	CANDELA	LUMENS
0	436	
5	434	41
15	418	118
25	386	178
35	343	214
45	287	222
55	224	200
65	154	153
75	84	89
85	21	25
90	0	

**ZONAL LUMEN SUMMARY**

ZONAL ZONE	LUMEN LUMENS	SUMMARY %FIXT
0-30	337	27.2
0-40	551	44.5
0-60	973	78.5
0-90	1240	100.0
90-180	0	0.0
0-180	1240	100.0

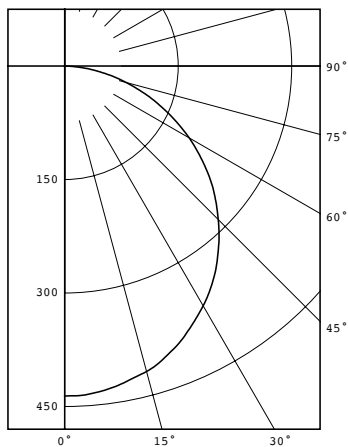

## P810016-030-30

### Dimming Notes:

---

P810016 is designed to be compatible with many Triac/Forward Phase or ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

### Dimming Controls

---

Lutron NTELV-300

Lutron DVELV-300P

Lutron DVCL-253P

Lutron Caséta

iDevices – IDEV0009

Leviton 6681

Leviton 6672

Lutron AYCL-153P

Lutron TGCL-153PH

Lutron NTLV-600

Lutron MAELV-600

Lutron AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.