


# T-Bar Integrated Luminaire

10W | 3500K | 2ft

Ideal for office buildings, medical, health and educational buildings, hotels, airports and more. Create your own custom look.

Replaces Standard T-BAR Cross Tees.

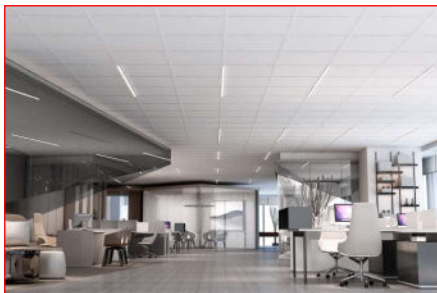

Seamless Integration  
into suspended ceilings allows  
unique and elegant architectural  
lighting designs

Slim Profile  
0.48" thickness

15/16"



Frosted Lens and 6 ft  
Power Cable with RJ45  
Jack

1 power supply (TBAR-PS-30W) required for 3 pieces of T-Bar.  
Optional 9/16" Clear Diffuser and Lens Diffuser available (sold separately).



Power Supply  
TBAR-PS-30W

## TECHNICAL DATA


### LIGHT SPECIFICATIONS

Lumens	1,300 lm
Efficacy	130 lm/W
CCT	3500K
CRI	80
Beam angle	120°
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	5-year


### APPROVALS AND LISTINGS

cUL	E491106
-----	---------

### ISOCANDELA PLOT

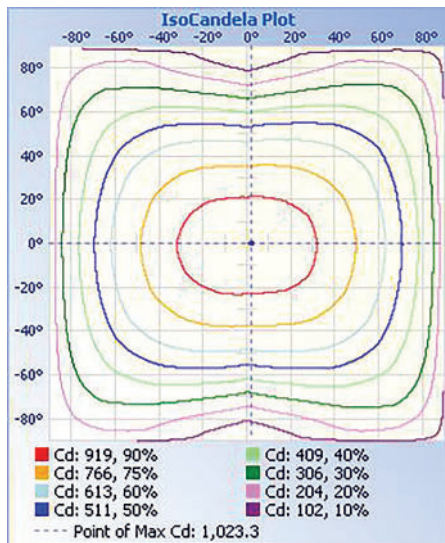

### ILLUMINANCE AT A DISTANCE

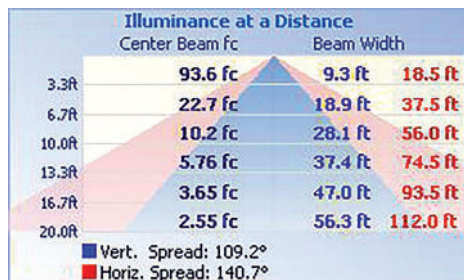

### ELECTRICAL

Wattage	10W
Voltage	120-277V
Power factor	0.9
THD	9%

### CONSTRUCTION

Housing	Aluminum
Finish	Silver
Unit gross weight	1.25 lbs
Carton weight	11.5 kg
Carton dimensions	64.5 x 54 x 19.5 cm

### ACCESSORIES (Ordered Separately)

Power Supply	TBAR-PS-30W
--------------	-------------

### DIMENSIONS

