

# Pivot

When searching for lighting flexibility, look no further than our 3", 4" & 6" flat gimbal LED downlights. With powerful lumen output and the ability to direct light with a 360° rotation and a 90° tilt angle, this product will meet your every need.

**UPGRADE**

WET SWIVEL/DIRECTIONAL 90°


ETL IC RATED

AIR TIGHT

COLOR TEMPERATURE\* 2700k 3000k 3500k 4000k 5000k

ENERGY STAR

**JA8** CERTIFIED

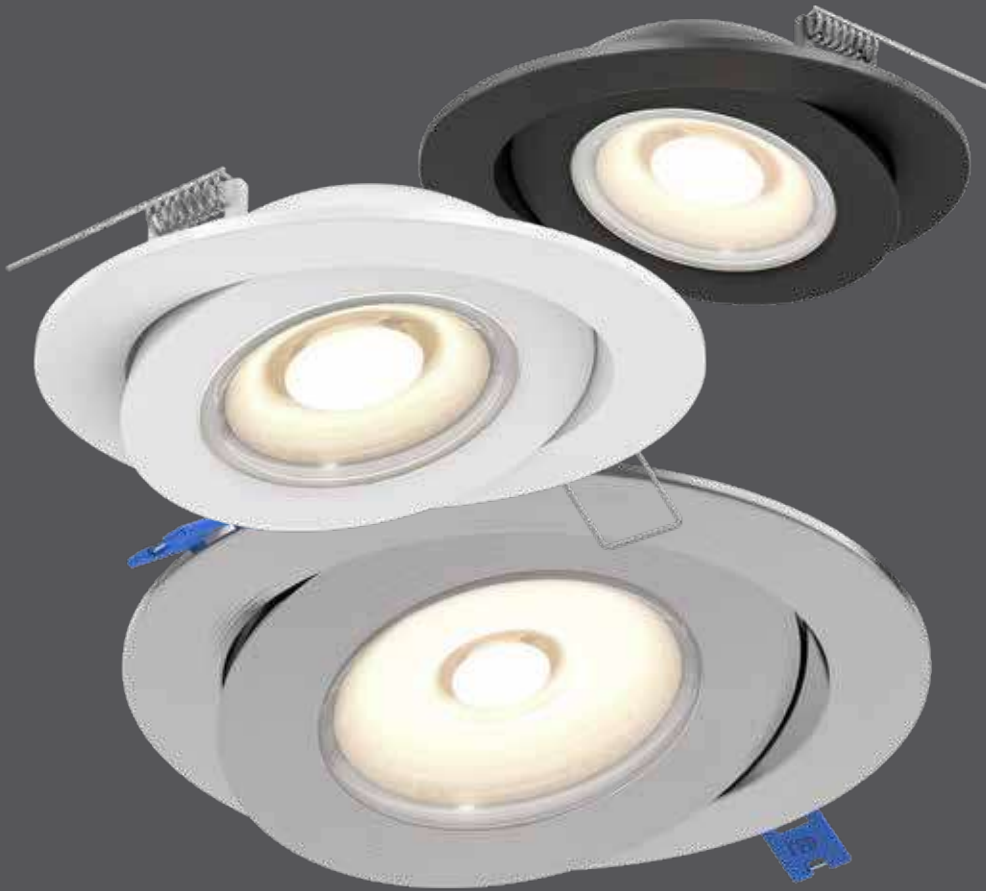

\*Models FGM3-CC, FGM4-CC, FGM4-CC-V, and FGM6-CC only

Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
<b>FGM4-3K</b>	4"	9 W	700 lm	850 lm	90	3000 K	120 V
<b>FGM3-CC</b>	3"	6 W	540 lm	690 lm		2700, 3000, 3500, 4000, 5000 K	120 V
<b>FGM4-CC</b>	4"	9 W	700 lm	850 lm			120 V
<b>FGM4-CC-V-WH*</b>	4"	9, 10 W	700 lm	850 lm			120, 277 V
<b>FGM6-CC</b>	6"	14.5 W	1050 lm	1200 lm			120 V

\* 0-10V dimming, white finish only

### Specifications

Every fixture includes a junction box with integrated dimmable driver  
 Can be daisy chained  
 Superior LED performance and lifespan  
 90° tilting, 360° rotation  
 Minimal heat emission  
 Aluminum construction  
 Switch-selectable CCT: 2700K/  
 3000 K/3500 K/4000 K/5000 K\*  
 Low profile  
 40° beam spread  
 IC certification (suitable for direct  
 contact with insulation)  
 Air-tight certified as per ASTM E283-04  
 Suitable for wet locations  
 Ideal operating temperature:  
 -20° to 40° C  
 5-year warranty

### Finish

- **BK** Black
- **SN** Satin Nickel (FGM4, FGM6 only)
- **WH** White

### Accessories

- RFP-UNI**  
Universal rough-in plate
- RFP-46**  
Rough-in plate for 4" and 6" models

### Note

Other color °T, finishes, and voltage options are available but may require MOQ's and longer lead times. Please contact your DALI representative for more information.

