


# Boulevard

The Boulevard series, an architectural recessed lighting channel that can be installed in a wide range of commercial and residential environments. Add depth to ceiling planes with a visible separation, or seamlessly daisy-chained to create dramatic effects.

**NEW** WET AIR TIGHT ENERGY STAR ETL Intertek IC RATED JA8 CERTIFIED

2700k 3000k 3500k 4000k 5000k

COLOR TEMPERATURE

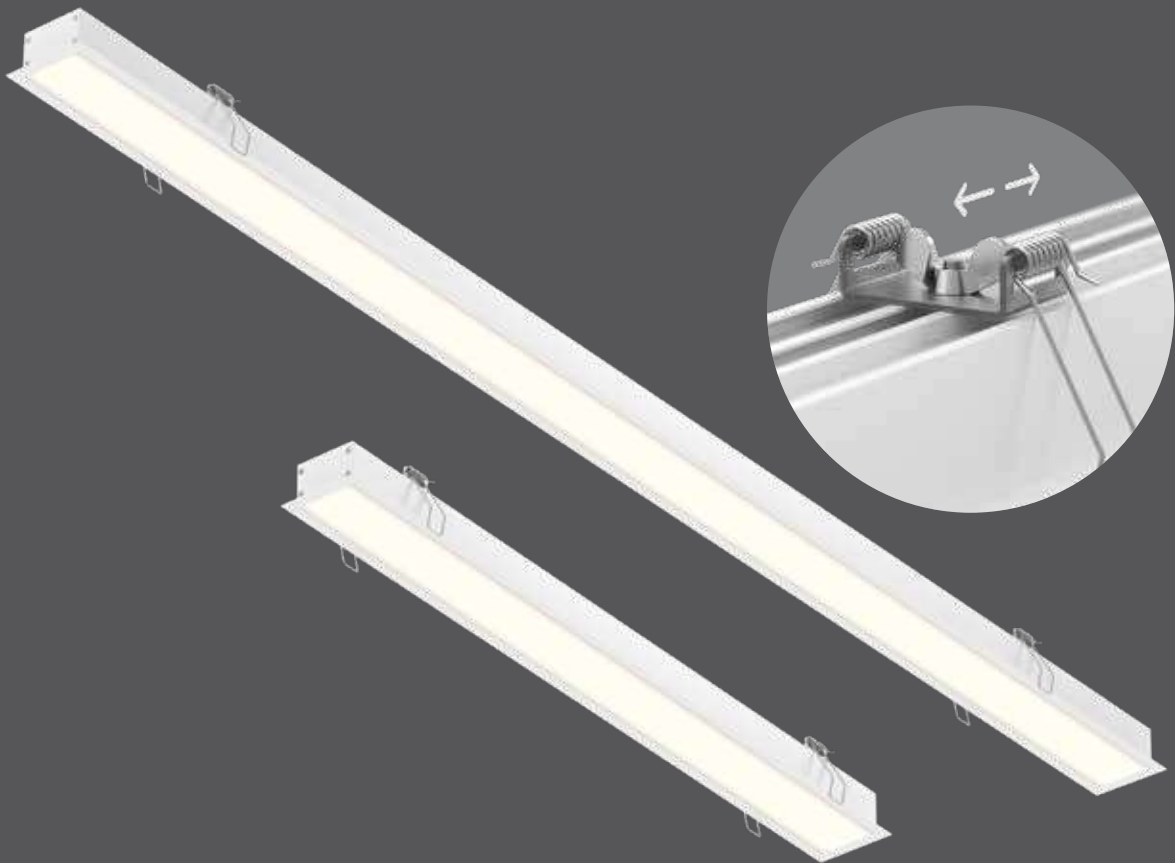

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
<b>LNR24-CC</b>	24"	20 W	1725 lm	90	2700, 3000, 3500,	120 V
<b>LNR24-CC-V*</b>	24"	20 W	1725 lm		4000, 5000 K	120, 277, 347 V
<b>LNR48-CC</b>	48"	40 W	3760 lm			120 V
<b>LNR48-CC-V*</b>	48"	40 W	3760 lm			120, 277, 347 V

\* 0-10V dimming

### Specifications

Every fixture includes a junction box with integrated dimmable driver  
 Can be daisy chained  
 Superior LED performance and lifespan  
 Minimal heat emission  
 Aluminum construction  
 Switch-selectable CCT: 2700K/3000 K/3500 K/4000 K/5000 K  
 108° beam spread  
 IC certification (suitable for direct contact with insulation)  
 Air-tight certified as per ASTM E283-04  
 Suitable for wet locations  
 Refer to website for dimmer compatibility  
 Ideal operating temperature: -20° to 40° C  
 5-year warranty

### Finish

○ **WH** White

### Accessories

**LNACC-L16FT**  
 16-foot lens for Boulevard series pendants and recessed linears

### RFP-LNR24


Rough-in plate



### RFP-LNR48


Rough-in plate

### Note

Other color °T, finishes, and voltage options are available but may require MOQ's and longer lead times. Please contact your DALI representative for more information.

**LNR24-CC** 23-3/8" x 2-1/8"   
**LNR24-CC-V**

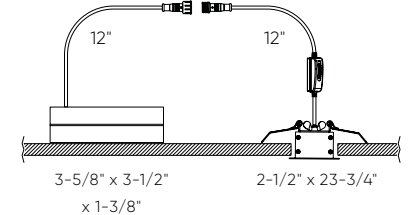

**LNR48-CC** 47-7/16" x 2-1/8"   
**LNR48-CC-V**

