

## MODEL 5004-DW NAME EXCEL 4" Round Panel Light With Dim-To-Warm Technology

Our new LED Panel lights are more accessible than ever before. The sleek and minimal construction allows for the easiest of installations.




**Canada** 80, de la Seigneurie blvd., E. Blainville, Quebec J7C 4N1 **U.S.A.** 4383, NW 124<sup>th</sup> Ave., Coral Springs, Florida 33065

877.430.1818 info@dals.com **dals.com** 

PROJECT:	TYPE:
DATE:	QTY:
	<b>u</b>
NOTES:	




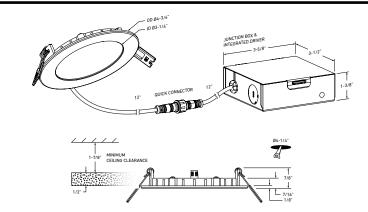

## QUICK SPECS

SIZE	WATTS	DELIVERED LUMENS*	COLOR °T	CRI	VOLTAGE	BEAM ANGLE	FINISH
4"	11W	850lm	3000K- 2200K	80	120V	110°	◯ White □

\*Lumen output measured at 3000K



CONSTRUCTION	<b>Lens</b>	<b>Type of optics</b>	<b>Type of LED</b>
	Frosted	Flat lens	Edge-lit SMD
	<b>Lens material</b>	Housing material	Cut hole size
	Acrylic	Cast aluminum	4-1/4"
RATINGS	<b>Placement</b>	<b>Lifespan</b>	<b>FT rating</b>
	Indoor/Outdoor	35,000 hrs.	FT4
	Location	<b>Certifications</b>	Operating
	Wet	ETL. FCC. ICES. ES	temperature

WHAT'S IN

THE BOX

LED recessed fixture Junction box Push-in wire connectors Mounting hardware Instruction sheet

COMPATIBLE	RFP-UNI
ACCESSORIES	Universal Drilling Pl
	2" (" and (" fixtures

Universal Drilling Plate For 2", 3", 4" and 6" fixtures

RFP-46 Drilling plate for 4" and 6" fixtures COMPATIBLE ADAPTERS **REC-EXT108** 108" extension cord for recessed fixtures

REC-EXT230 230" extension cord for recessed fixtures

	80, de la Seigneurie blvd., E Blainville, Quebec J7C 4N1	U.S.A. 4383, NW 124 <sup>th</sup> Av Coral Springs, Flo	- /	877.430.1818 info@dals.com <b>dals.com</b>	ļ
<b>Input voltage</b> 108-132V	<b>Output current</b> 250mA	<b>Power factor</b> 96%	<b>Driver type</b> Constant current		
Output voltageLED model #30-46V2835		THD harmonic distortion <30%		<b>Binning type</b> 3 SDCM	
Every fixture includes a junction box with an integrated driver	Superior LED performance and lifespan	Minimal heat emission Frosted lens	Dim-to-w	varm	
Can be daisy chained	Smooth 360° wide spread	Edge lit technology	3000 K to	2200 K to	
covers repairs or replace	ement of defective parts of the	housing,			
	108-132V Output voltage 30-46V Every fixture includes a junction box with an integrated driver Can be daisy chained DALS offers a 5-year wat covers repairs or replace optics, and electronics. T	108-132V 250mA   Output voltage LED model #   30-46V 2835   Every fixture includes Superior LED   a junction box with an performance and   integrated driver lifespan   Can be daisy chained Smooth 360° wide   spread DALS offers a 5-year warranty from the date of purchase   covers repairs or replacement of defective parts of the	Input voltage 108-132VOutput current 250mAPower factor 96%Output voltage 30-46VLED model # 2835THD harmonic distortion <30%	Input voltage 108-132VOutput current 250mAPower factor 96%Driver ty ConstantOutput voltage 30-46VLED model # 2835THD harmonic distortion <30%	Input voltage 108-132VOutput current 250mAPower factor 96%Driver type Constant currentOutput voltage 30-46VLED model # 2835THD harmonic distortion <30%

## **RECOMMENDED DIMMER LIST\***

BRAND	MODEL #	DIMMER SPECS	GRADE	DIMMING RANGE (%)	MAX LOAD
Lutron	DVELV-300P-WH	300W electronic low voltage dimmer	Compatible	Min: 8 / Max: 88	27
Lutron	MA-PRO-WH	ELV, 250W LED/CFL	Compatible	Min: 2 / Max: 100	22
Lutron	Caseta PD-5NE-WH-C	ELV, LED—up to 250 W	Compatible	Min: 3 / Max: 100	22
Control 4	C4-APD120-WH	ELV, 120W LED	Compatible	Min: 0 / Max: 100	10