

Phase 3 LED

Wall Mounted • Damp Location Listed **PROGRESS LED**

Description:

Phase 3 Collection 24 in. Matte Black Medium Modern 3CCT Integrated LED Linear Vanity Light


Specifications:

- Diffused Plastic Cylindrical
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" recessed outlet box: 6.09 in W., 4.96 in ht., 1.38 in depth
- Swivel mounting strap for outlet box included
- 10 in of wire supplied
- Americans With Disabilities Act (ADA) compliant

Performance:

Input Power	18 W
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Delivered)	1,644/91 (LM-79)
CRI	90 CRI
Life (hours)	50000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15, Class B
Warranty	5-year Limited Warranty
Labels	cCSAus Damp Location Listed Meets California Title 24 JA8-2016

P300411-31M-CS

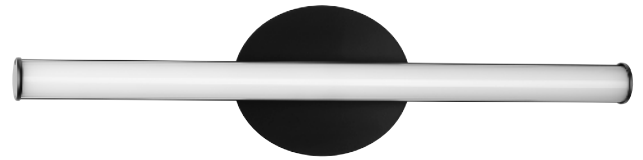

Dimensions:

Width: 24 in
Extends: 3 in
Height: 5-11/16 in (glass facing up)

P300411-31M-CS

Photometrics:

ELECTRICAL DATA	P300411-31M-CS
Input Voltage	120 V
Input Frequency	60 Hz
THD	<20%
EMI/RFI	FCC Title 47, Part 15, Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*
Over-voltage, over-current, short-circuit protected	

*See Dimming Notes for more information

P300411-31M-CS

Dimming Notes:

P300411-31M-CS is designed to be compatible with many ELV/Reverse Phase Triac/Forward Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls:

Eaton SAL06P

Leviton 6681

Leviton IPI06-1LZ

Leviton 6672

Leviton 6674

Lutron NTEVL-300

Lutron DVELV-300P

Lutron DVCL-253P

Lutron Caseta Wireless

Idevices IDEV009

Lutron AYCL-153P

Lutron SCL-153P

Lutron TGCL-153-PH-WH

Lutron MACL-153M

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.