

Project:
Fixture Type:
Location:

### Quadrant LED

Ceiling/Stem + Chain Mounted • Damp Location Listed PROGRESS LED

Contact:

# Description:

Quadrant LED Collection 6-Light Matte Black Frosted Glass LED Modern Chandelier Light


### **Specifications:**

- · Frosted Acrylic Cylindrical
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" recessed outlet box: 7.875 in W., 4.75 in ht., 1.375 in depth
- · Mounting backplate for outlet box included
- 120 in of wire supplied 108

#### **Performance:**

Number of Modules	6
Input Power	24 W
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Delivered)	1,399/59 (LM-79)
ССТ	3000 K
CRI	90 CRI
Life (hours)	50000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15, Class B
Warranty	5-year Limited Warranty
Labels	cETLus Damp Location Listed
	Meets California Title 24 JA8-2019

# P400264-031-30

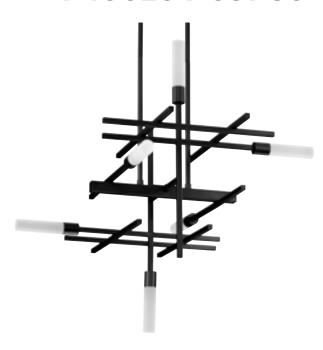

### **Dimensions:**

Length: 26-1/8 in Depth: 26-1/8 in Height: 26-1/8 in

Overall Ht. W/Chain And Stem: 71.05 in

Frosted Acrylic Cylindrical

Width: 1-1/4 in Height: 4-3/4 in



# Quadrant LED

Ceiling/Stem + Chain Mounted • Damp Location Listed PROGRESS LED

### **Dimming Notes:**

P400264-031-30

P400264-031-30 is designed to be compatible with many ELV controls.

The following is a partial list of known compatible dimmer controls.

#### **Dimming Controls:**

Lutron\_DVELV-300P

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.