

Globe LED

Ceiling cord Mounted • Damp Location Listed PROGRESS LED



Description:

Distinctive Classic globe pendants are accented by striking metal caps over an opal glass shade. This pendant is ideal for Modern, Mid-Century or Farmhouse interior design styles. These versatile pendants can be displayed singularly or in groupings of two or more by mixing and matching finish options and lengths to create custom lighting designs for the home. Complimented by a Brushed Nickel finish.

Specifications:

- Opal glass Globe
- One-light 9-watt Globe LED cord-hung pendant
- The cap holds a beautiful opal glass shade ready to emit gentle illumination.
- A distinctive classic globe pendant is accented by a striking metal brushed nickel cap.
- This versatile pendant can be displayed as a single fixture or in groups of two or more to create a custom lighting design for your home.
- Ideal for any foyer, kitchen, or dining room.
- Perfect for mid-century modern, transitional, modern, or contemporary settings.
- Measures 8" diameter x 9 3/4" H
- Overall length with cord is 122"
- Uses one LED module (9w max).
- Warm white 3000K lighting color and 90+CRI
- Ideal for classic Mid-Century interiors or Farmhouse design styles
- ENERGY STAR certified
- Replaceable light engine is California JA8 certified
- Dimmable with most Triac or ELV type dimmers
- California Title 24 compliant
- Damp location listed
- Installation instructions and mounting hardware.
- Progress Lighting products are designed for exceptional quality, reliability, and functionality.
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" recessed outlet box: 5.5 in W., 1 in ht., 5.5 in depth
- Mounting strap for outlet box included
- 120 in of wire supplied

Performance:

| | |
|------------------------|-------------------------------------|
| Number of Modules | 1 |
| Input Power | 9 W |
| Input Voltage | 120 V |
| Input Frequency | 60 Hz |
| Lumens/LPW (Source) | 624/66 (LM-82) |
| Lumens/LPW (Delivered) | 439/47.2 (LM-79) |
| CCT | 3000 K |
| CRI | 90 CRI |
| Life (hours) | 60000 (L70/TM-21) |
| EMI/RFI | Meets FCC Title 47, Part 15 Class B |
| Warranty | 5-year Limited Warranty |
| Labels | cCSAus Damp Location Listed |
| | ENERGY STAR® qualified |
| | Meets California Title 24 JA8-2016 |


P500147-009-30



Dimensions:

Diameter: 8 in
Height: 9-3/4 in
Overall Ht. W/Cord: 122 in

Opal glass Globe
Width: 7-7/8 in
Height: 7-3/8 in

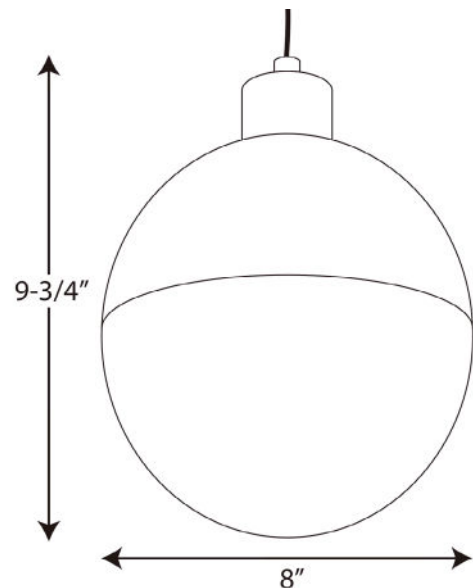


Photometrics:

P500147-009-30

| | |
|---|-------------------------------------|
| ELECTRICAL DATA | P500147-009-30 |
| Input Voltage | 120 V |
| Input Frequency | 60 Hz |
| Input Current | 0.075 A |
| Power Factor | Greater than 0.90 |
| THD | <20% |
| EMI/RFI | Meets FCC Title 47, Part 15 Class B |
| Operating Temperature | -30 °C |
| Dimming | Yes* |
| Over-voltage, over-current, short-circuit protected | |
| *See Dimming Notes for more information | |

P500147-009-30
 LED Light Engine: 3000 K 90 CRI
 System Wattage: 9
 Fixture delivered lumens: 388
 Fixture Efficacy: 41.7
 Spacing Criteria:

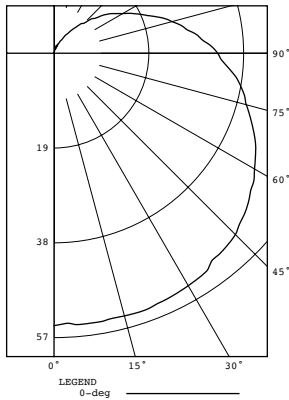

Test 18.00159 Test Date 02/15/18

| CANDELA DISTRIBUTION | | |
|----------------------|---------|--------|
| DEG | CANDELA | LUMENS |
| 0 | 54.6 | |
| 5 | 54.6 | 5 |
| 15 | 54.5 | 15 |
| 25 | 54.2 | 25 |
| 35 | 53.3 | 33 |
| 45 | 51.4 | 40 |
| 55 | 48.1 | 43 |
| 65 | 44.6 | 44 |
| 75 | 39.9 | 42 |
| 85 | 35.2 | 38 |
| 90 | 32.8 | |
| 95 | 29.9 | 33 |
| 105 | 24.5 | 26 |
| 115 | 18.6 | 19 |
| 125 | 13.8 | 12 |
| 135 | 8.5 | 7 |
| 145 | 4.9 | 3 |
| 155 | 2.1 | 1 |
| 165 | 1.0 | 0 |
| 175 | 0.0 | 0 |
| 180 | 0.0 | |

| ZONAL LUMEN SUMMARY | | |
|---------------------|--------|-------|
| ZONE | LUMENS | %FIXT |
| 0-30 | 46 | 11.8 |
| 0-40 | 79 | 20.4 |
| 0-60 | 162 | 41.7 |
| 0-90 | 287 | 74.0 |
| 90-120 | 77 | 19.9 |
| 90-130 | 90 | 23.1 |
| 90-150 | 100 | 25.7 |
| 90-180 | 101 | 26.0 |
| 0-180 | 388 | 100.0 |

P500147-009-30

Dimming Notes:

P500147-009-30 is designed to be compatible with many Triac/Forward Phase ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls:

Lutron_Diva DVELV-300P

Lutron_Nova T NTELV-300

Lutron_Caseta

Lutron_Ariadni AY-600P

Leviton_Illumatech IPI06-1LZ

Leviton_SureSlide 6672

Lutron_Ariadni AYCL-153P

Lutron_Skylark Contour CTCL-153P

Lutron_Diva DVCL-153P

Lutron_Toggler TGCL-153P

Lutron_Maestro MACL-153M

Lutron_Ariadni AYLV-600P

Lutron_Nova T NTLV-600

Lutron_Maestro MAELV-600

Lutron_spacer/system SPSELV-600

Leviton_Renoir II AWRMG-EAW

Lutron_Nova N-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.